AVIATION AND AERONAUTICAL ENGINEERING

© Underwood and Underwood

View of the United States Aviation School at San Diego, Cal.

MARCH
15th
1917

SPECIAL FEATURES

SEAPLANE FLOAT FORMS

AIR MANEUVERS AT MINEOLA

THE LATE COUNT FERDINAND VON ZEPPELIN

AN AMERICAN ENGINE FOR PURSUIT AIRPLANES

COURSE IN AERODYNAMICS AND AIRPLANE DESIGN

THE INFLATION AND MANIPULATION OF DIRIGIBLE BALLOONS

PRICE
Ten
Cents

PUBLISHED SEMI-MONTHLY
BY
THE GARDNER, MOFFAT CO., Inc.
120 W. 32nd ST. NEW YORK

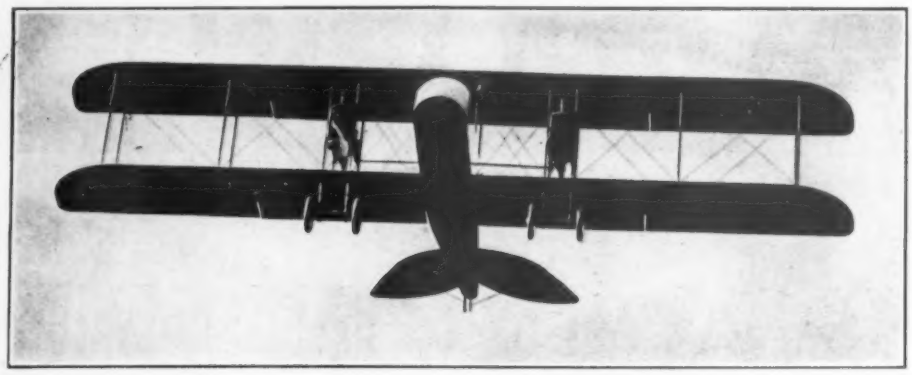

AEROPLANE TUBING

ESPECIALLY MADE TO YOUR OWN REQUIREMENTS

We are at present manufacturing for the largest aeroplane manufacturers both here and abroad our high grade tubing made to any contour and thickness of wall on short notice.

We have exceptional facilities for almost over-night deliveries.

Steel tubing made for all requirements.

Send us your inquiries.

The Empire Art Metal Co., Inc.
College Point, N. Y.

HALL-SCOTT

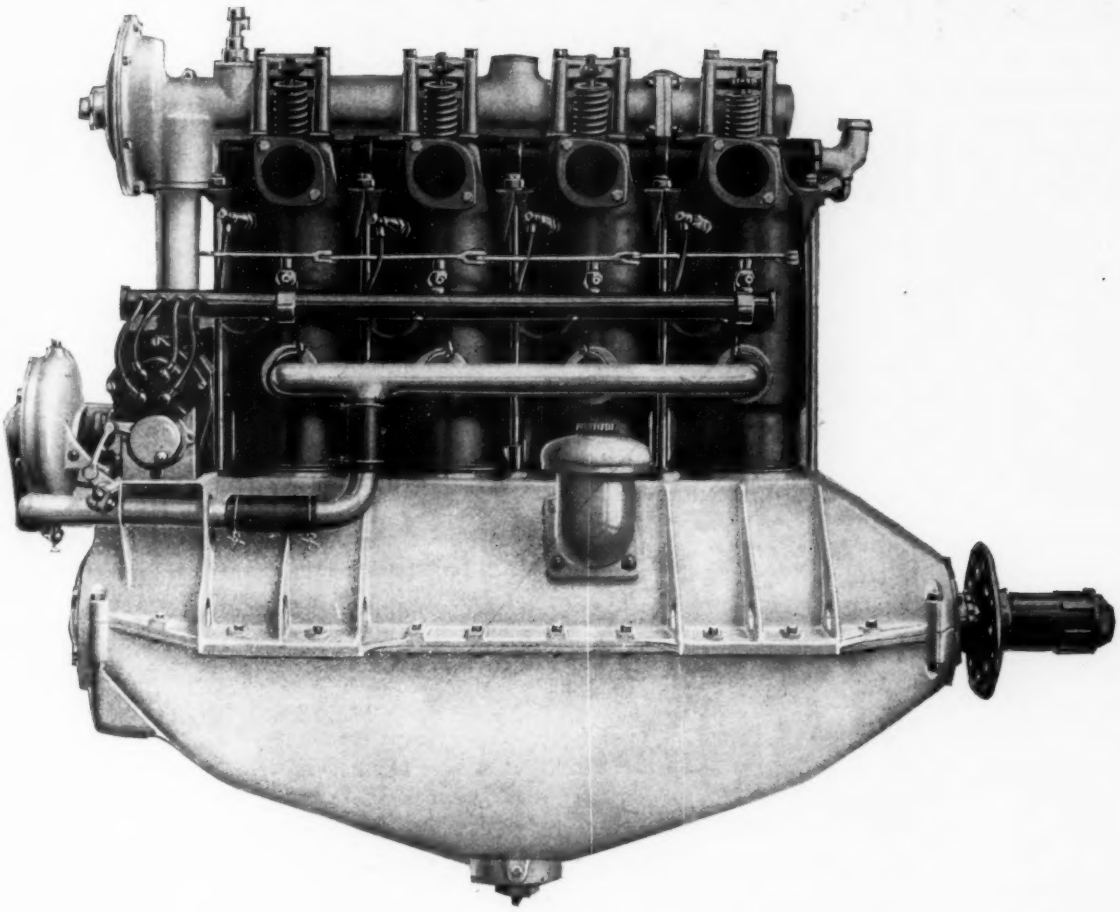

The Hall-Scott, Type A-7a, 100 H.P., Four Cylinder, Airplane Engine, is offered as the most ideal equipment the market affords, for Army and Navy TRAINING and LIGHT SCOUTING Machines.

The design of this engine provides for sturdy construction, coupled with light weight. With proper use, 100 hours of actual flying service may be obtained without overhauling.

Governments that have knowledge of excessive upkeep costs of lighter type, short duration engines, of complicated design and delicate mechanism, will be interested in this equipment.

Total weight, complete and ready for service, but without lubricating oil,	*400 lbs.*
Weight per H.P. (Based on actual H.P. development, at 1,300 R.P.M.)	*3.50 "*
Consumption gasoline in lbs. per H.P. hour,	*.557*
" lubricating oil " " "	*.045*

The Perfect Air Starter, used in connection with this engine, will afford ideal starting service. Added weight of the starting equipment, complete, 56 lbs.

Hall-Scott Motor Car Co., Inc.
General Offices
Crocker Bldg., San Francisco, Calif.

F. P. Whitaker
EASTERN REPRESENTATIVE
165 Broadway, New York City

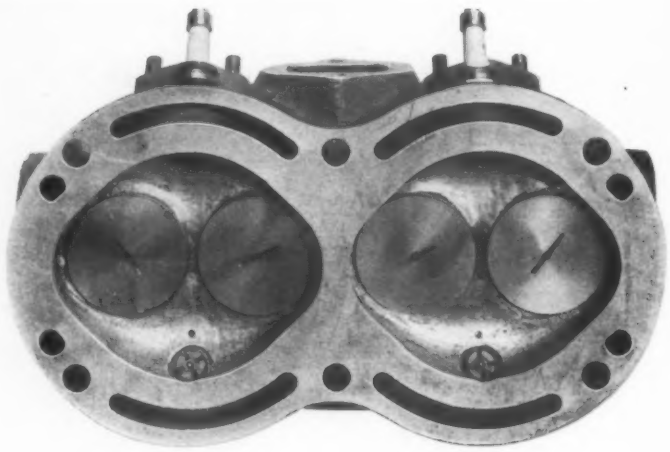

STURTEVANT

CYLINDER HEADS

The aluminum cylinder heads of the Sturtevant Aeronautical Engine are completely water-cooled with ample passages for unobstructed circulation of the cooling water around the valves. Cast iron valve seats are employed. Overheated valves are an unknown trouble in the Sturtevant Engine.

Sturtevant
REG. U. S. PAT. OFF.
B. F. STURTEVANT COMPANY
Hyde Park, Boston, Massachusetts

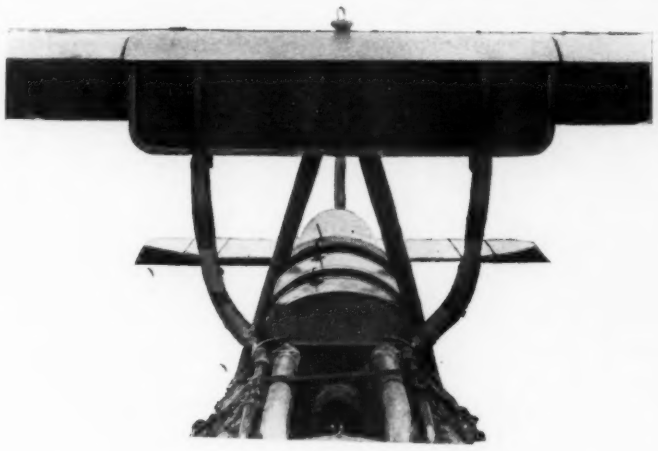

NEFFICIENCY

RADIATORS

The small, light radiator, fitting neatly into the top wing of the Sturtevant Aeroplane, has eliminated the usual cooling troubles. The circulation of water is greatly improved and the weight and resistance is reduced by this simple and efficient solution of a difficult problem.

Sturtevant
(REG. U. S. PAT. OFF.)
AEROPLANE COMPANY
Jamaica Plain, Boston, Mass.

STANDARD AERO CORPORATION

Experience

STANDARD AIRPLANES are the product of experience.

Mr. Charles H. Day, chief engineer and designer of the *Standard Aero Corporation* and one of the notable figures of American aeronautics, has been connected with aeronautical engineering from its infancy. Around him has been gathered an organization of trained workers who bring to their tasks not only the experience which they have gained in the factories of the *Standard Aero Corporation* and other American manufacturers, but also, in many cases, valuable training secured in factories of the big airplane manufacturers abroad.

EXPERIENCE—another reason for the supremacy of *STANDARD AIRPLANES.*

Chas. H. Day and a Standard H-3

STANDARD AERO CORPORATION

Factory: **Plainfield, N. J.**

Executive Offices: **Woolworth Building, N. Y. C.**

·LATEST·OFFICIAL·CLIMB·
·3750·FEET·IN·10·MINUTES·
·FULL·GOVERNMENT·LOAD·

·L·W·F·ENGINEERING·COMPANY·

REPEATED TESTS OF THIS CURTISS J. N.-4 EQUIPPED WITH

ACKERMAN WHEELS

DEMONSTRATED THAT STARTING AND LANDING SHOCKS INCIDENT TO ROUGH GROUND ARE PRACTICALLY ELIMINATED.

IN ACTUAL TESTS *ACKERMAN WHEELS* HAVE SUCCESSFULLY RESISTED A SIDE THRUST STRESS OF 27,000 POUNDS, WHILE UNDER A SIMILAR BLOW CALCULATED TO PRODUCE AN ENERGY OF 49,800 POUNDS THE ONLY DAMAGE DONE WAS TO BREAK FOUR SPOKES.

ACKERMAN WHEELS CAN BE DEPENDED ON TO PREVENT STARTING AND LANDING ACCIDENTS DUE TO THE COLLAPSE OF ORDINARY WHEELS.

Built in different sizes to carry any load from 500 pounds up to five tons.

The Ackerman Wheel Co.

Rockefeller Building, Cleveland, O.

MARCH 15, 1917

AVIATION
AND
AERONAUTICAL ENGINEERING

VOL. II. NO. 4

INDEX TO CONTENTS

	PAGE
Editorial	171
Seaplane Float Forms	172
An American Engine for Pursuit Airplanes	175
The Inflation and Manipulation of Dirigible Balloons	177
Course in Aerodynamics and Airplane Design	178
Air Maneuvers at Mineola	182
The late Count Ferdinand von Zeppelin	183

THE GARDNER, MOFFAT COMPANY, Inc., *Publishers*
120 WEST 32D STREET NEW YORK

SUBSCRIPTION PRICE: ONE DOLLAR PER YEAR. SINGLE COPIES TEN CENTS. CANADA AND FOREIGN: ONE DOLLAR AND A HALF A YEAR. COPYRIGHT, 1917, BY THE GARDNER, MOFFAT COMPANY, INC.

ISSUED ON THE FIRST AND FIFTEENTH OF EACH MONTH FORMS CLOSE FIVE DAYS PREVIOUSLY. ENTERED AS SECOND-CLASS MATTER, AUGUST 3, 1916, AT THE POST OFFICE AT NEW YORK, N. Y., UNDER ACT OF MARCH 3, 1879.

Creagh-Osborne Air Compass

Radium Dial for Night Flying

For Military Aviators

Indispensable for Reconnaissance Flying

THE SPERRY GYROSCOPE COMPANY

126 Rue de Provence
Paris, France

MANHATTAN BRIDGE PLAZA
BROOKLYN, N. Y.
Telephone: 9700 Main

15 Victoria Street
London, S. W.

AVIATION TRAINING

THE CURTISS School of Aviation will give training this winter, in Florida, to those civilians who may be accepted by the Aviation Section, U. S. A., upon their having made application for enlistment in the Aviation Reserve Corps. Applicants must be between twenty-one and twenty-seven years of age, possess good health, character and college education or equivalent. Tuition will be paid by the Government.

FOR FURTHER INFORMATION WRITE

THE CURTISS TRAINING SCHOOLS

CHURCHILL STREET, BUFFALO, N. Y.

Curtiss

We give Military Aviation Training at either of our Established Schools—

Newport News, Va., and Miami, Fla.

Curtiss

PRESIDENT AND EDITOR
LESTER D. GARDNER

MILITARY EDITOR
PHILIP J. ROOSEVELT

AVIATION AND AERONAUTICAL ENGINEERING

TECHNICAL EDITOR
A. KLEMIN, A.C.G.I., B.Sc., S.M.
Instructor in Aeronautics
Massachusetts Institute of Technology

MANAGING EDITOR
HERBERT M. WILLIAMS, B.S.

Vol. II | March 15, 1917 | No. 4

OWING to the filibuster at the end of the last session of Congress the Army appropriation bill failed to pass and the urgent deficiency bill also did not become a law. The failure of these two bills to pass is having the effect of making it extremely difficult for the Aviation Section, Signal Corps, U. S. A., to continue the upbuilding of the Army's aerial arm in an orderly and systematic manner.

The urgent deficiency bill contained an amendment authorizing the Aviation Section to spend $4,500,000 out of the $13,281,666 appropriated for military aeronauties, August 29th 1916, for the purchase of permanent sites and buildings.

The organization of Army training schools and the establishment of air stations by the Army is greatly hampered by the failure of the urgent deficiency bill to pass. Under the law the Army is not allowed to erect permanent buildings on leased land. The Army training schools at San Diego, Mineola and Memphis are all established on leased land.

The Aviation Section of the Signal Corps desires to purchase many permanent sites. It therefore does not consider it wise to spend too much money upon temporary hangars. Satisfactory temporary hangars are difficult to get promptly. One effect of this situation is that at Mineola there are many more machines than there are hangars for storing the machines in. For this reason some of the recently arrived machines have not yet been set up.

At Memphis Captain Morrow is using canvas hangars. Airplanes and airplane engines are delicate pieces of mechanism and the protection afforded by canvas hangars can hardly be of the very best.

An extra session of Congress has been called and it is to be hoped that one of its first acts will be to pass the appropriation bills and the urgent deficiency bill. Meanwhile the work of training aviators for the Army is being delayed.

The Passing of a Great Inventor

The death of Count von Zeppelin finds the question of the exact value of the large rigid dirigible still problematical. Offensively, it may be said that Zeppelins are failures, but owing to the limited carrying capacity of heavier-than-air machines there is no doubt that rigid lighter-than-air craft, which can travel at 75 miles per hour carrying two and a quarter tons of munitions besides their fuel and crew, have a distinct place of usefulness in war. At this moment the United States Navy is at work on plans for a large rigid dirigible. It is always possible that our Navy may go into action 2,000 miles from its nearest base. If the Navy were called upon to engage in such an action the presence of a large rigid dirigible equipped with powerful radio might perform the function of eyes for the fleet.

A brief review of Count von Zeppelin's failures and disappointments should teach the lesson that this country cannot hope to build huge dirigibles without a certain number of setbacks. The present day Zeppelin is the culmination of forty-three years of arduous theoretical work and more than twenty years of practical experience, not to mention the expenditure of millions upon millions of dollars.

Count von Zeppelin's death marks the passing of a great, practical, scientific inventor who succeeded in perfecting, after years of patient and discouraging endeavor, a type of aircraft which has a definite field of usefulness.

The lesson which his work should teach the United States is the value of endless patience and scientific application of sound engineering to pioneer work.

Activity at Army Schools

The approach of Spring is the signal for a great stimulus to Army aviation. The first week in March witnessed about 250 hours of successful training flights at the Army Flying School at Memphis, Tenn., and also the successful institution of a regular program of air problems which the First Reserve Aero Squadron at Mineola, L. I., will practice every week for several months.

The Mineola flying field is closed to all civilians, except those with special permits, by orders of the War Department. This condition exists because of the international situation. While it is imperative that every proper precaution be taken against injury to Government property, the War Department might do well to consider the advisability of opening a certain part of the field on Saturday afternoons so that the public could have tangible evidence of what the Aviation Section of the Army is actually doing to build an adequate air fleet for the United States. Such action would serve a useful purpose.

Seaplane Float Forms

By Charles G. MacGregor

The float of a seaplane is that part of the machine which enables it to float on, rise from and alight on the water. It performs the same functions on the seaplane as the landing gear on the land machine, and is virtually a small boat divided into water-tight compartments, connected to the machine proper by steel or wood struts and wire stays of sufficient length to give good clearance for the propeller from the hull and the water. It is necessarily built very light and strong enough to withstand the enormous impacts to which it is subjected; it is of such a force as best suits its peculiar duties when on the water, at the same time offering as little head resistance as possible when the machine is in flight. The seaplane when on duty must be able to put to sea in anything but lifeboat weather. It may have to run out of the harbor in the

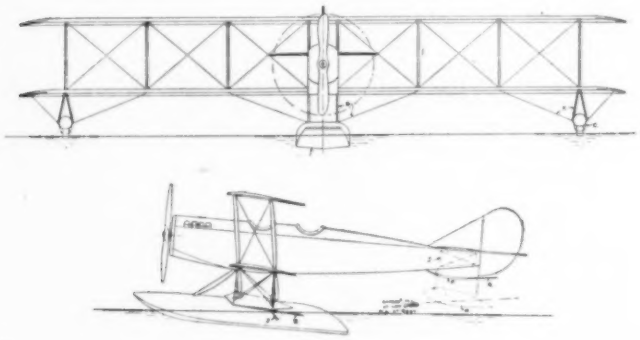

FIG. I

face of a strong breeze and a heavy sea, or be launched from the mother ship either by being hoisted over the lee side by a derrick or by being projected from the deck of the ship by means of a launching catapult, or it may be carried out to sea on the back of a submarine, which acts as a floating dock by submerging when launching the seaplane into the water, and emerging from under when taking it out on its back.

On getting under way in a seaway, the float is often completely submerged in solid water; then, again, it will nose into the waves as the seaplane gathers speed. On reaching planing speed (which is from about 20 miles per hour and up, until the machine attains the maximum or "getting off" speed), the seaplane will often jump clear out of the water, but, not having gained enough speed to sustain it in flight, it stalls and flops in again, sometimes flat on the bottom or flat on the tail of the float, or even at a most dangerous angle. This hopping, as it is called, may be repeated over and over again until sufficient speed has been gained to enable the machine to jump from a wave crest and continue its flight in the air. On alighting, the buffeting is no less severe, and, when flying with a cross wind, the danger is increased, as the machine will skid unless the float should be of such a form as to minimize this.

Where two floats are used instead of the single one, the whole landing gear is subjected to most severe straining, as when the bow of the one float is under water, bearing almost the whole weight of the machine, the tail of the other float may be completely out of the water or supported by another wave, thereby putting the whole of struts, wire gear and floats under very severe twisting, straining and tension. It is here that great rigidity or extreme flexibility, in the form of shock absorbers, is a commendable feature in the float attachments.

It will thus be seen that the seaplane is no fair-weather machine, and that the float, apart from its high speed and planing qualifications, performs a more important function than is generally appreciated.

DESIGN

In determining the size of the float when it is being designed, several important points must be considered. The float supports the weight of the whole machine, and should have an excess buoyancy of from 70 to 150 per cent of the weight of the complete seaplane in its loaded condition. This reserve buoyancy enables the machine to recover quickly when the float is submerged in a seaway. When running on the surface there is always a possibility of the float being damaged, such as having the sides or bottom pierced by shell fire or by striking a partially submerged log or driftwood; therefore, the interior is divided into independent water-tight compartments, usually about six in number and arranged in such a manner as to insure the machine against sinking or capsizing when any one compartment is flooded.

There are two distinct types of landing gear, the single float and the twin floats.

THE SINGLE FLOAT

When Glenn H. Curtiss first experimented on Lake Keuka, N. Y., in 1910, he used on his machine a single float, which was an ordinary canoe (Fig. VI-A) lightly decked over. Since then the single float has been used extensively, and makes a very satisfactory and seaworthy outfit, provided the machine is of the single engine type (Fig. I). There are few struts and wires, the air resistance is comparatively small, and in a

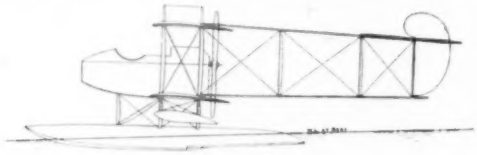

FIG. II

seaway there is less racking and straining on the whole gear than is the case with the twin float landing gear.

The length and breadth dimensions of the float are important.

In a head sea the machine is subjected to a considerable amount of pitching and rolling. When, by the action of the waves, a boat oscillates in a longitudinal direction about a transverse axis, it is said to "pitch," and when it oscillates in a transverse direction about a longitudinal axis it is said to "roll." Rolling and pitching generally take place together in a seaway. "Heaving" is the vertical motion given to a boat by the waves. So it is imperative that the float should have sufficient longitudinal stability when pitching, to prevent the machine falling back on its tail or forward on its nose, and have sufficient lateral stability to eliminate any undue amount of rolling over on the wing tips. There are instances where the main floats have been too short, lacking in stability, and the machines have fallen back on their tails, and finally turned right over on their backs. This can be prevented by the use of a small float fitted below the tail (Fig. I-F), or by fitting a water-tight tank inside, at the after end of the body (Fig. I-J). The bow of the float must have sufficient bearing surface to prevent the machine tipping over on its nose when alighting or getting under way. This tipping tendency can be minimized by keeping the center of thrust of the propeller as low as practicable.

To prevent the wing tips dipping or being submerged when the machine is heeled over by a sudden gust of wind, small floats are attached to the extremities of the wings (Fig. I-C). These assist the main float in maintaining lateral stability. A flexible planing board or paddle is usually fitted to the underside of these floats (Fig. I-E), to absorb the shock if the float strikes water when running at high speed. The buoyancy of the float materially assists the machine to recover quickly to an even keel. These wing and tail floats should be of sufficient buoyancy or volume to support the machine when inclined over on the wing to port or starboard, or back on the tail. They are fitted either close up to the main structure (Fig. VII-C-D-E) or held sufficiently far below by means of struts and wires, to keep them just clear of or touching the water when the machine is at rest (Fig. VII-A-B).

When a seaplane is running at low speed on the water, steering is very difficult because of the insufficiency of wind pressure on the rudder to keep the machine under control. This fault can be overcome to a certain degree by the use of water

rudders. These can be arranged for either on the wing floats in the form of small horizontal flappers or drags fitted to operate below the planing boards (Figs. I-J and VII-A), or by arranging the tail float so that it is partly submerged (Fig. I-H) when under way, and having it placed so that it can be turned to port or starboard with the air rudder; the water bears on the flat of the side. By this means it performs the duties of a float and a water rudder at the same time. Another method is by the use of a small water rudder. The air rudder post is extended down to a point below the water, supporting the after end of the float and a small metal rudder

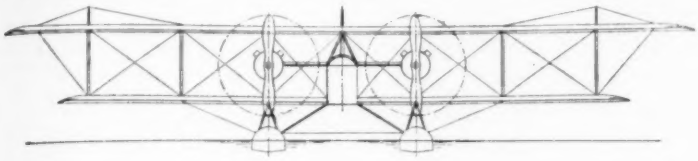

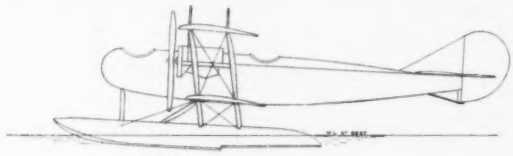

FIG. III

blade (Fig. VII-F). This rudder is sometimes arranged to operate independent of the air rudder. If the main float is sufficiently long, the tail float can be dispensed with (Fig. II), but the wing floats should always be used with the single main float.

TWIN FLOATS

For good all-round service, the twin-float landing gear (Fig. III) is very satisfactory. As already stated, the whole gear is subjected to most severe racking and straining, but apart from this it is a very stable, seaworthy and serviceable outfit. By the use of twin floats, the wing floats can be dispensed with, except in the case of some torpedo seaplanes where the floats are very close together (Fig. IV); but the tail float should be used where the main floats are short, as with the single short float (Fig. I). The main floats must not be

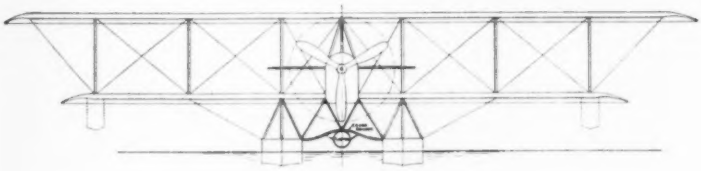

FIG. IV

spread too far apart, for, when one float is submerged more than the other, the machine has a strong tendency to spin around quickly, due to the increased resistance of the immersed float, the decreased resistance of the emerged float and the leverage between them.

For twin engine or twin body machines, they are particularly favorable in that each supports directly the weight of one engine or one body (Fig. III). This arrangement of floats is also most suitable where the machine is used as a torpedo-carrier or as a bomb-dropper. The torpedo is carried suspended from the cross braces between the floats, and just clear of the water (Fig. IV). When ready to be launched, the torpedo can be instantly released from the slings or brackets and dropped into the water; similarly the bombs have a clear drop from below the body.

HYDROPLANING

Before describing the various float forms, it is necessary here to give a very brief and simple outline of the theory of hydroplaning, for clearer understanding of the principles involved in the designing of the bottom or planing surface of the seaplane float.

The principle of hydroplaning can be very clearly illustrated by taking a flat stone or slate and throwing it on to the water's surface at a flat angle, so that when it strikes the water on the flat of its under face, the impact will cause it to skim along the surface of the water, sometimes in a series of jumps for a number of yards, until it loses its momentum. This is almost exactly the behavior of a float or hydroplane on reaching planing speed.

THE MULTISTEP FLOAT

The multistep or Fauber type hydroplane has from two to seven steps built in on the bottom, transversely and one ahead of the other (Fig. VII-C). This type is not quite practicable on the seaplane float when more than two steps are used, as these oppose the rocking motion so necessary on the seaplane float. With so many breaks on the bottom the resistance in flight would be increased. The construction would be heavier and more costly than the others.

TOPSIDE FORMS

The topsides, like the bottoms, are of various forms. The simplest is that with the flat sides and deck. Structurally, it is very simple, but the proportion of the weight to the strength is rather excessive. The efficiency of the flat deck, in freeing itself from water when submerged, can be improved by giving it a camber or slight round transversely (Fig. VI-C). The tails of many of the earlier types were built almost square at the back (Fig. VI-B); they were not conducive to the reduction of resistance or weight, and were slightly heavier and weaker than those which curved down from the deck to the tail without a break (Fig. VI-C). Fig. VI-D shows a very efficient form of stepless float, where an attempt has been made to introduce the streamline form as much as possible without sacrificing the seaworthiness.

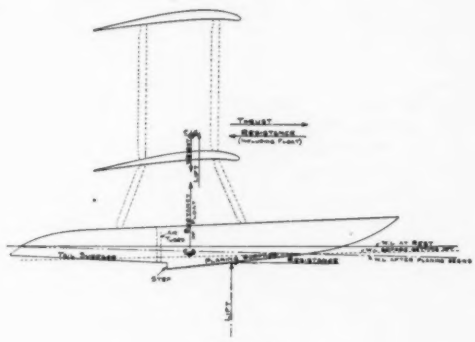

FIG. V

The present Navy type has some features worth noting, principally the V-bottom and the crowned or rounded topsides (Fig. VII-A). This form of topsides allows of a stronger and lighter construction being used than that of the other types; it is a fairly good streamline form, and when the float is buried in a wave, it will throw the water off and allow the machine to recover quickly, a very important asset when traveling in a rough sea. With a flat top under these same conditions, it has a tendency to hold the water and make the machine act sluggishly.

WING AND TAIL FLOATS

Reference having already been made to the uses of the auxiliary floats, we will now discuss their general design and form.

They are built of either wood or metal, wood being found to be more satisfactory than metal, except in the smaller sizes and cylindrical forms. This cylindrical form is shown in Fig. VIII-A, the ends are conical and the bottom is flat, against which the planing board is fitted. This was one of the earliest types used and has been very satisfactory. It is suspended below the tail or wing by struts, so that it is just clear of the water with the planing board touching when the machine is at rest. In the larger size and V-bottom floats, the planing boards are dispensed with almost entirely.

Fig. "B" is of a simple streamline form suspended close to the surface of the water. "C" is one of the larger type, fitted close up to the wings or tail. It is of the concave V-bottom class and very efficient. "D" is another of the earlier

forms of metal floats, fitted with planing board and flat or slightly V-bottom. These are so narrow and deep that a brace is necessary from the bottom to the wing beam. "E" is a similar type to "C" except that it is made to the same form of the body on top, with a straight V-bottom. Instead of having a planing board attached to the bottom, an ash skid is fitted to protect the rudder. "F" (previously referred to) is similar to "B" except that the sternpost is vertical instead of horizontal, so that the water will have a clear run to the water rudder which is swung at the back.

The interior of each of these floats is divided into two or more water-tight compartments, similar to thhe larger floats, by cross bulkheads; which also help to stiffen the floats transversely.

Fig. VI shows in outline some of the commoner types of stepless floats. "B" is a simple form from a building standpoint, and runs well in calm water, but, owing to the flatness of the bottom, the structure is apt to be strained by the severe impacts with the water; nor does this flatness help to prevent skidding. "C" is not quite so simple structurally as "B," but is a much better form to withstand impacts. Being V-shaped, it cuts into the water more or less, and thereby relieves the strain on the bottom structure. It is comparatively simple to build, prevents skidding or side-slipping to a great extent, and is an altogether satisfactory form for general uses.

"D" has all the qualifications of "B," with the exception

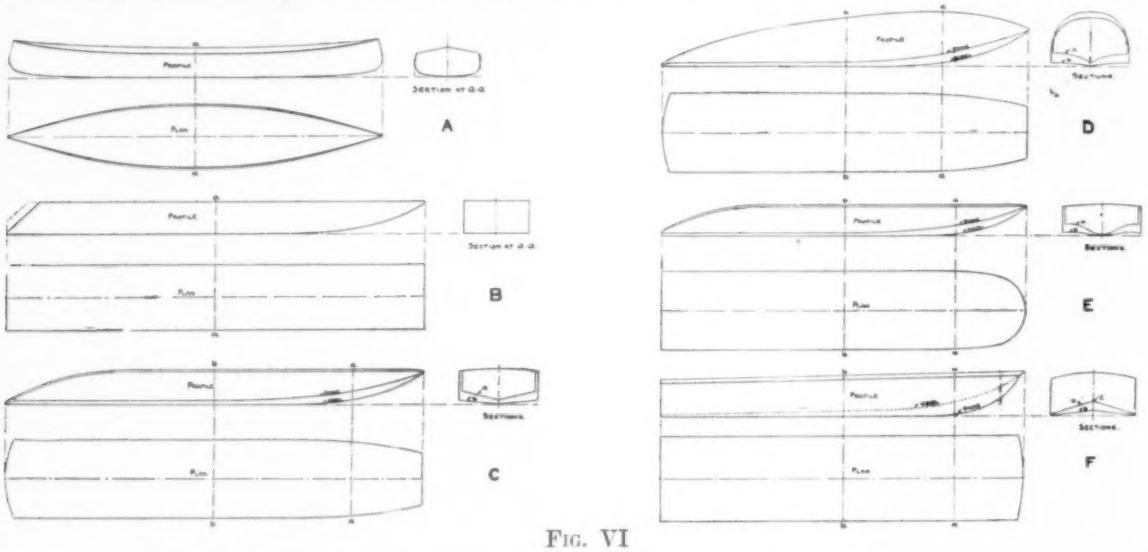

FIG. VI

Fig. V shows diagrammatically the various forces acting on a seaplane when running on the water. With the forward motion of the float given by the thrust of the propeller, the pressure of the water on the planing surface, which is inclined at an angle varying from 2° to 5° when running, supplies an upward acting component which lifts the float nearer to the surface as the speed increases. As the speed increases the displacement decreases, both by the increase of the lift on the planing surface and the lift proper of the wings. When running at low speed before planing starts, there is a great deal of resistance due to wave and eddy making, which diminishes rapidly as the higher planing speeds are attained and when the lift of the wings becomes effective. A break is made in the streamline of the bottom so that the machine can get off the water easily. This is accomplished by the introduction of a transverse "jog" or step on the planing surface, varying in depth from 1½ to 5 inches (Fig. V). To relieve the bottom at the back of the step from any suction or eddies, air is allowed access to this part through tubes, usually led down from the deck to the bottom abaft the step. These air tubes are not essential where there is a very pronounced "V" on the bottom, or where there is plenty of reserve power.

FLOAT FORMS

The floats now in general use are of various forms on the topside, bottom and planing surface. These can be classified as follows:

1. The stepless float
2. The step float
3. The multi-step float

The topside form is not governed by the bottom form, so that any of those shown in Fig. VI can be combined with any other type.

THE STEPLESS FLOAT

In the stepless float there is no break in the bottom, so that it forms the entire planing surface. The tail end takes the place of the step, therefore the float must leave the water at this part. This form of bottom is practicable on the short floats only, of lengths up to fifteen feet, because the break or step should be kept not far from a point directly below the center of gravity of the machine; the farther it is from the center of gravity the more difficult it becomes to get the machine off the water.

that it is more difficult to maintain the concave bottom form when building; this concavity is increased at the forefoot or in the bow sections, and materially helps to reduce the pounding of the waves on the planking. "E" is not used much on floats on account of its width not being sufficient to get the full benefit of this type of bottom, which is known as the "Wave-collecting" form, and is adopted mainly in motor-boat design and sometimes in flying-boats.

"F" is the "Viper Sea Sled" type of hull, and has been very successful and seaworthy for the ordinary seagoing launch, but it has not been developed in seaplane float design on account of its unusual form, the inverted V, which makes the introduction of the step on the planing surface a very unsatisfactory proposition; without the step the machine would require a large amount of reserve power to get off the water. Great transverse strength is required in the bottom structure to resist the outward pressure of the water on the bottom, tending to split it at "e"; this necessitates the carrying of more weight than is required for the ordinary V-bottom, so that this is detrimental to its adoption on the seaplane float. It is, however, very easy in a seaway, and very high speeds have been attained by its use.

THE SINGLE STEP FLOAT

The qualifications of the planing surfaces of the stepless floats, apply equally to the single step float. This type is the one most commonly used. Having only one step, air resistance is minimized, and by placing this in proper relation to the center of gravity, the machine will balance well when planing. The best position for the step is roughly from about 6 to 36 inches abaft the center of gravity of the machine. Should the step be placed ahead of this point, the machine will be inclined to porpoise, thereby rendering it liable to the smashing of a wing by excessive rolling, or tipping over on the nose and capsizing.

When running at high speed, the straight V-bottom throws a thin sheet of water and spray out on each side, which are caught by the propeller or propellers, thereby drenching the machine. To prevent this, spray strips are attached to the chines or outer edges of the planing surface (Fig. VII-A), which deflect the water downward. Fig. VII-B illustrates a type of float used extensively in Europe but not adopted in this country. The design is the outcome of extensive tank

model experiments made in England (see *British Report*, 1912-1913).

The design is peculiar in that it shows a flat bottom, flaring bows, and rather a fine entrance; it depends on its length for longitudinal stability. The bearing surface of the bow increases very rapidly as the bow is depressed, on account of the flaring sides. When being towed in the tank, the model threw a thin sheet of water out on each side, close to the sides; this was deflected by fitting the spray strip along each side.

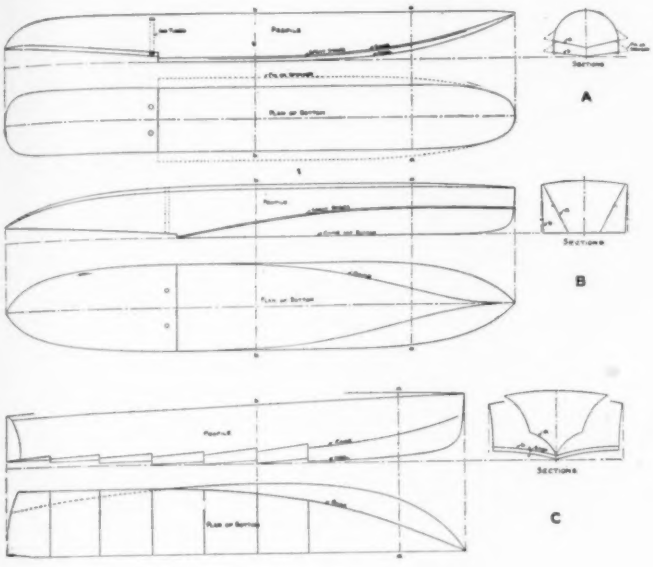

FIG. VII

In the single step float the tail surface does not act as a planing surface, therefore it should rise from the step to the stern at an angle of from 3° to 6°, so that there will be no opportunity of causing a suction action when the machine is running on the step and about to get off the water. This surface is usually flat or of V-form, the latter being preferable, for when the float strikes the water with the tail, the V-form relieves the shock.

On reaching the higher speeds just before leaving the water, it is possible, with the single step, to rock the machine about this point by means of the controls, in order to get a flatter angle of planing surface, and adjust the wings nearer to the angle of incidence necessary for flight. This maneuver is rendered difficult where more than one step is used on the bottom, as these tend to oppose the rocking motion.

Several tests have been made with attached planes, in the nature of plates fitted to the bottom with struts. With the bracing necessary for their attachment to the hull, they add a considerable weight to the machine besides the float weight, and at this point of attachment the force of the weight of the whole machine is concentrated, then, with the jumping action of the seaplane when planing, this force is enormously increased; then again they are most awkward when handling or stowing the machine either on shore or aboard ship.

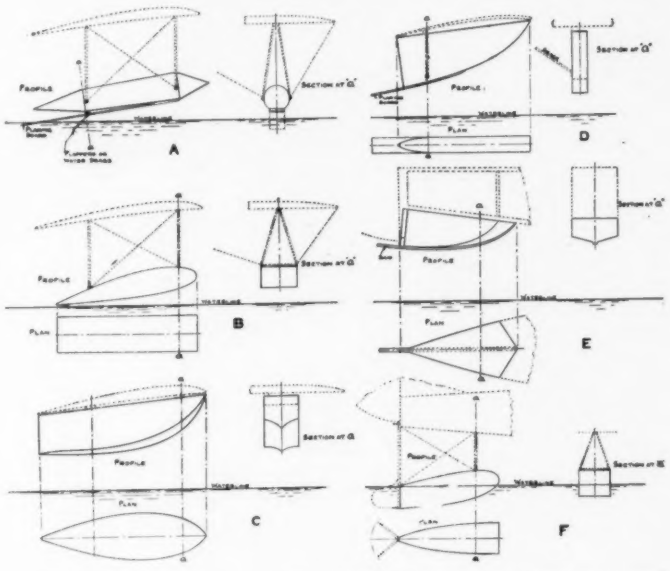

FIG. VIII

Sometimes more planing surface is required on a single step afloat without increasing the volume or dimensions of the body of the float. This can be obtained by extending the planing surface out on each side, from 5 to 10 inches, according to the additional amount required, the outer edge curving in at the fore-end. This extends from the step forward to within about 24 inches from the stem on each side. Additional buoyancy can be obtained, without adding much to the weight, by planking over the braces from the edge of the planing surface to the hull side, thus making two water-tight compartments called fins or sponsons (Fig. VII-A).

An American Engine for Pursuit Airplanes

To meet the demand for an extremely light aeronautical engine for use in pursuit machines and in training work, the General Vehicle Company of Long Island City has made arrangements with the Gnome and Le Rhone Engine Company of London to build and sell 9 cylinder 100 h.p. Gnome engines in the United States. The exhibit of this company at the recent Pan-American Aeronautic Exposition attracted great attention because of the fact that it was announced at the exposition that the United States Government had ordered one hundred of these engines for Army and Navy use.

In material and workmanship, as well as developed horsepower, these engines are equal to similar engines produced in France and England. The fine workmanship has gone far to solve the problem that has confronted the manufacturers of how to get an engine of small weight per horsepower for use in scouting airplanes. The 100 h.p. Gnome engine is used abroad in small scouting airplanes for short flights of from one and one-half to two and one-half hours in work where tremendous speed and climbing ability are required. These little machines can dodge and outmaneuver larger planes, and can land in and get out of fields which heavier airplanes cannot use.

CYLINDERS

The engine is of 9 cylinders of 4.3-in. bore by 5.9-in. stroke. Each cylinder is machined from a drop forging. The original drop forge weighs about 88 lbs., the finished cylinder 5½ lb. Each cylinder is drilled near the bottom with a number of circular ports connecting the interior of the crank case with the cylinder.

CRANK CASE

The crank case, which shows perhaps the finest workman-

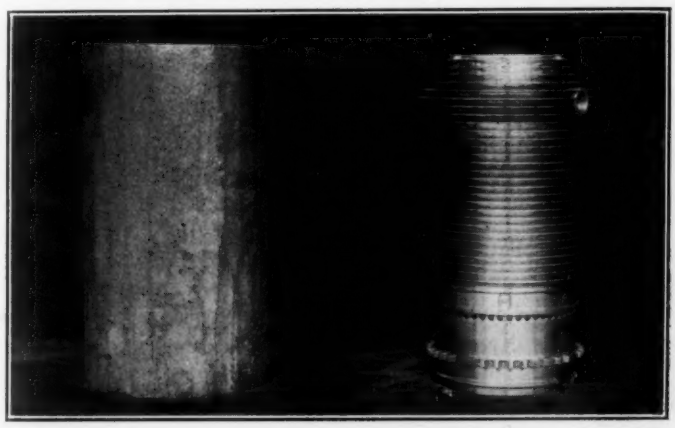

ROUGH CASTING AND FINISHED CYLINDER

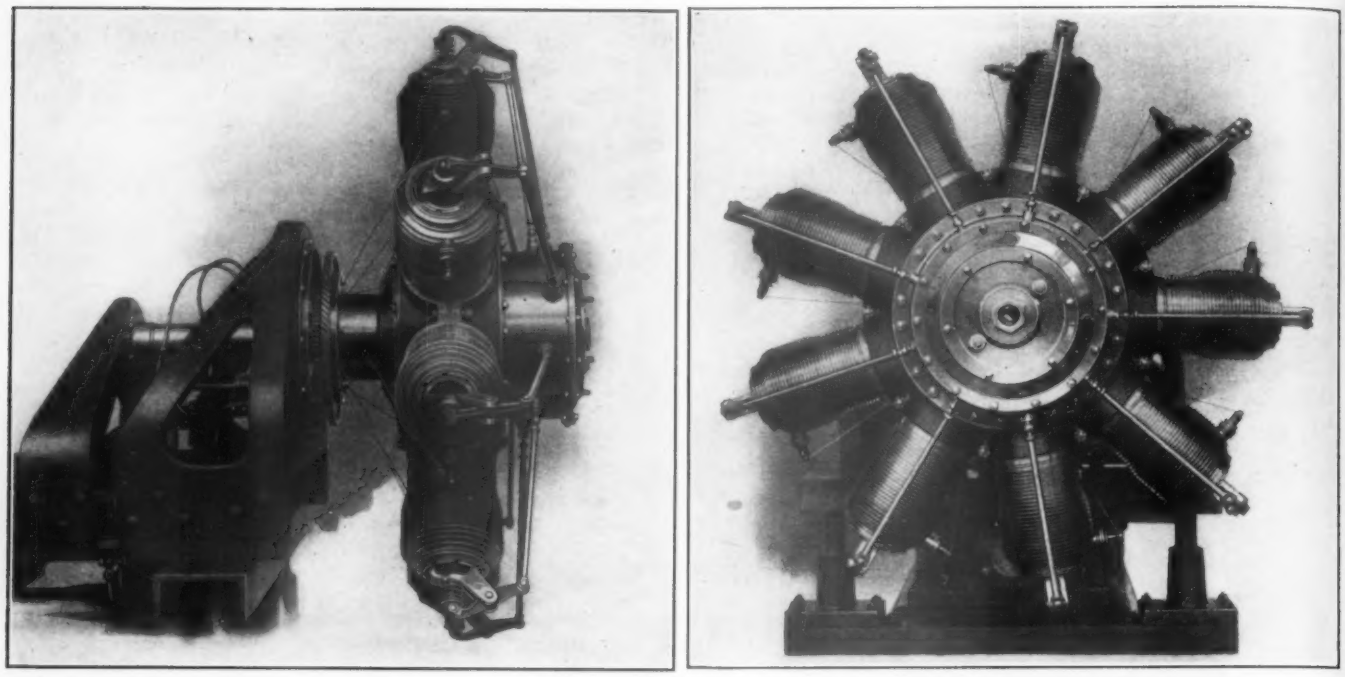

SIDE AND FRONT VIEWS OF THE 100 H.P. ENGINE MADE BY THE GENERAL VEHICLE CO.

ship of any airplane engine part now on the market in the United States, is made in two pieces fastened together by bolts. The halves of the crank case clasp the cylinders at their base. The cylinders are prevented from turning in their setting in the crank case by keys.

The ports are uncovered by the pistons near the bottom of the stroke, permitting a passage from the crank case to the cylinders (see Fig. 1).

The exhaust valve and seating is fixed at the extreme outer end of each cylinder by means of the usual castellated ring nut. The weight of this valve is so adjusted that its centrifugal action, when the engine is rotating, is equal to that of the tappet rod and lever: and thus the use of counter-balance weights, such as are fitted to the rocking levers of the ordinary Gnome engine, is avoided.

The system of connecting rods is similar to the ordinary Gnome engine, and is composed of one master rod and eight small rods.

THE CRANKSHAFT

The crankshaft, which is hollow, is in two parts, but the smaller half can be dismantled from the front of the engine. The rear or large end of the hollow crankshaft is open to admit air and contains the petrol jet, while the front nose extension is closed.

The petrol jet is shown in Fig. 3. The petrol is supplied from its reservoir to a union on the crankshaft, then passes along a copper pipe to the elbow. The jet which projects into the crankcase is held on to a nipple with a ground conical seat by a screw. It has eight holes which project the petrol downwards in the direction of the flow of mixture towards the opening ports in the cylinder.

THE CAMSHAFT

The camshaft, which is fitted at the small end of the crankshaft, turns at half the speed of the engine and in the same direction and is operated by the usual satellite pinions.

Lubrication is by means of the usual Gnome pump, with forced feed to the gudgeon pins.

CYCLE OF OPERATIONS

The engine works on the four-stroke cycle. Consider a cylinder in which the piston is on the compression stroke and follow the engine through two revolutions.

Ignition, which is "fixed," is set to take place 15° to 20° before the top dead centre (*A*, Fig. 2).

Working stroke. After ignition the piston descends on the working or power stroke, as shown by the arc *B C* (Fig. 2).

Exhaust stroke. When the cylinder has turned through 85° from the top centre, the valve begins to open, and exhaust of the products of combustion commences (Fig 2, *C*). The exhaust stroke continues until the piston returns to the top dead centre, as shown by the arc *C D E F*.

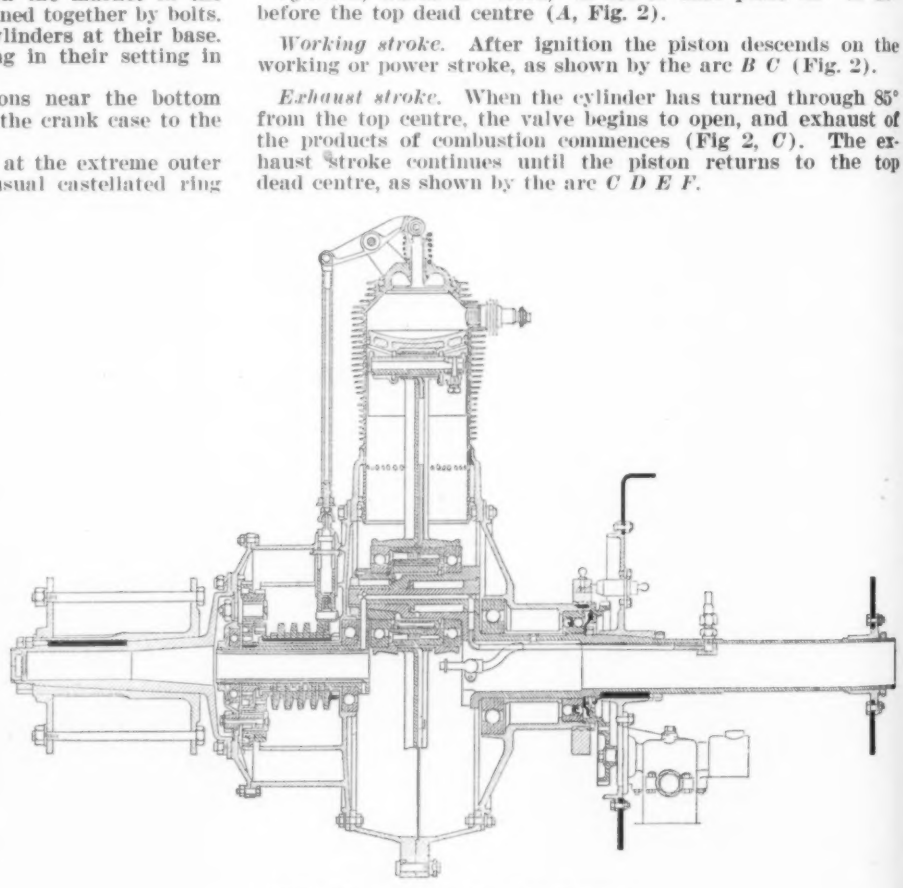

CROSS-SECTION OF GNOME ENGINE

Induction stroke. The valve still remaining open, the piston descends on the induction stroke, drawing air into the cylinder through the valve. 65° before the bottom centre the valve closes (*H*, Fig. 2). On the piston continuing to descend, a partial vacuum is created in the cylinder until it is 20° from the bottom centre (*I*, Fig. 2).

At this point the piston uncovers the ports in the cylinder wall, making connection between the cylinder and the crankcase, and a very rich petrol mixture is drawn into the cylinder. This rich mixture is diluted by the air already in the

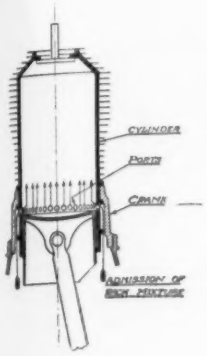

FIG. 1

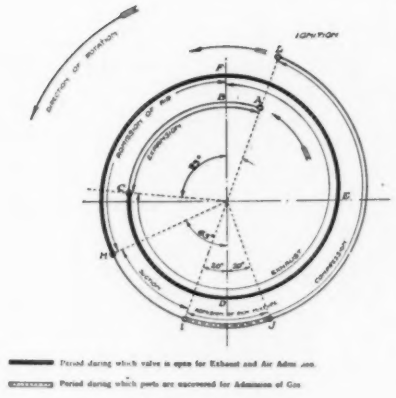
IGNITION
DIRECTION OF ROTATION
EXHAUST
COMPRESSION
Period during which valve is open for Exhaust and Air Admission
Period during which ports are uncovered for Admission of Gas

FIG. 2

cylinder, and the resulting mixture in the cylinder is a good combustible gas. The ports in the cylinder will remain uncovered until the piston reaches the point *J* (Fig. 2), on the return stroke.

Compression stroke. On the closing of the ports the piston ascends on the compression stroke *J* (Fig. 2), and when 20° from the top centre (*L*, Fig. 2) ignition occurs, and the cycle of operations is repeated.

NOTE.—*The timing diagram given in Fig 2 is an average from a number of tests. It is found that engines vary slightly, and each engine is supplied with a special set of timing figures which should be used and adhered to.*

GENERAL DESCRIPTION

The general specifications of this engine are as follows:

Maker	General Vehicle Co., Inc.
Model	100 H. P. Gnome Monosoupape (B-2).
Number of Cylinders	9
Bore	110 m/mx150 m/m stroke.
H. P.	100 and upward.
R. P. M.	1200-1250.
Weight of Engine, with Ignition, but empty	272 lb.
Gasoline Consumption per Hour	12 (American) Gallons.
Oil Consumption per Hour	2.4 (American) Gallons.

The Inflation and Manipulation of Dirigible Balloons

By C. F. Smyth

The handling of lighter-than-air aircraft is a subject requiring much experience and study. Work of this character is being undertaken daily in Europe. A study of European methods will undoubtedly be of value for this country.

The usual method of inflating a balloon is to lay it out with the top exposed. The gas is conducted from the gasometers or generators through a main line of pipe to a point within ten feet of the balloon. The balloon is folded so that the inflating top is directly under the center and a tunnel is made of sand bags by laying them in parallel lines one foot apart from the generators in under the folds of the gas bag. The inflating hose is conducted through the tunnel to the main gas pipe.

As the envelope inflates, the sand bags suspended on the belly-band are let down a foot at a time until the envelope is raised high enough to put the car in place. The suspension ropes are toggled to the car and sand bags are hung along the car to hold it securely to the ground. The junction from the main tube is fixed with a piece of flexible hose that will allow the gas to go only one way. This is done so that if anything happens to the main hose pipe there will be no reverse action of the gas blowing out.

Ballonets are placed in position before the gas is turned on, together with the valves and ropes required to operate them. Great care should be taken at all times to see that there are no holes in the ballonets, as the most essential thing in the mechanical end of inflating is to have absolutely tight ballonets so as not to destroy the specific gravity of the gas.

GETTING AWAY

The usual method of preparing for an ascent is as follows: The necessary amount of ballast for the useful load is placed in the car of the dirigible and balanced in the hangar. The car is then conducted to the field, where a further balance is made by placing the passengers or carrying load in their places, although it is better to do this in the hangar. The captain or man who is to handle the dirigible must also be balanced and an amount of ballast equal to his weight is placed at the station of the captain while the balancing is being done.

The captain usually stands far enough away from the car to watch the fore and aft balance, which is usually about two lengths of the entire envelope, this being the common practice in Europe. His commands are usually given by whistles.

When the requisite balance, which is usually a trifle heavier than air, has been made, he takes his position and liberates the water ballast, which is equal to his weight. The propellers can then be started at low speed. The ground men then walk along with the car suspended above their heads until the speed required to take control of the rudders is reached. It is essential that at all times the dirigible should be headed into the wind. The angle of ascent in a still atmosphere is usually about 10°, but should there be any wind, say, 10 miles an hour, the angle of ascent can be made perpendicular to the ground simply by manipulating the propellers so that the speed of the dirigible is equal to the velocity of the wind.

The landing place is usually designated by spreading a flag or banner on the ground at a spot where the majority of the ground men are stationed. When there is a strong puffy wind blowing, the ground men should be scattered over a larger area. When coming in at a speed equal to the velocity of the wind the drag rope is liberated from the car when at a height of about 100 feet. This unrolls and is dropped to the ground and is immediately caught by the ground men, thus liberating a certain amount of weight and holding the balloon in suspension. When once the balloon is near enough to the earth so that a sufficient number of ground men can take hold of the frame, the motors are cut off. The drag line is so arranged that when it is cast off and the ground men have taken hold of it, the balloon will head into the wind.

LANDING TO ENTER SHED

The usual method of housing a balloon after the landing has been made is to have the anchor catch the mooring device. Heavy ropes are pulled up and the dirigible is moored to a car and trolleyed into the shed. If a car is not provided for this purpose, a number of men hold the frame horizontal, a couple of feet above the ground, and twelve men take hold of the equator lines to steady the swaying of the envelope in case of a strong side wind. The strain on the ballonets is relieved by mechanically opening the valves until the gas pressure is equal to the surrounding air.

EMERGENCY LANDING

In case of breakaway or of engine trouble, rendering the dirigible helpless if it is flying heavier-than-air and over territory unsuitable for landing, it becomes necessary to throw out an amount of ballast equal to the difference in load, thus ascending and floating along until a place is reached where a landing can be made. Such a spot is usually selected passing over a wood just before coming to a large field. To land immediately after passing the wood first drop the drag rope. Then by estimating the distance, drop the anchor into a barbed wire fence or a heavy tree. In case this cannot be done, drop the second drag rope and immediately open the gas valve and when within a few feet of the ground pull one or both ripping panels according to the prevailing weather. This will immediately discharge the gas, and as soon as sufficient gas is let out, allow one or two men to step out of the car and hold the nose ropes provided fore and aft to force the gas to the ripping panels.

In case of landing over water, the dirigible is provided with a water anchor, which can be dropped over and held until assistance is secured.

Course in Aerodynamics and Airplane Design*

By Alexander Klemin, A.C.G.I., B.Sc., S.M.

Instructor in Aeronautics, Massachusetts Institute of Technology, Member of the Aeronautical Society of Great Britain and Ireland,

and

T. H. Huff, S.B.

Instructor in Aeronautics, Massachusetts Institute of Technology

Copyright, 1917, by A. Klemin. All Rights Reserved.

PART II—SECTION 3

Estimates of Weight Distribution

Difficulties of the Subject

Hardly any branch of practical airplane design offers such difficulties as the estimate of weights. A manufacturer who has built a number of machines and has kept careful weight schedules has valuable data in his possession, but is, as a rule, chary of making such data public. Even an experienced manufacturer, however, may be at a loss when building an entirely new type, particularly if the new type is of a very different size from that to which he has been accustomed.

Theoretical considerations apply only to a limited extent. Empirical formulas have been suggested by several authorities, but are only partly satisfactory. The authors' thanks are due to manufacturers and others for such data as they have permission to publish.

Weight Schedules for a Machine of the Unarmed Tractor Reconnaissance Type (Two Seater) Over 2500 Lb. in Weight

Full weight data can be published for one of the five machines which have been examined in Part 2, Section 1—the Standard H-3. The schedule for this machine is very complete, and is almost exactly in the form specified by the Aviation Section of the Signal Corps.

TABLE I.

Standard H-3, Hall-Scott A-5, 135 h.p. Maximum speed 84 m.p.h. Minimum speed 46 m.p.h. Climb 3400 ft. Total wing area, 532 sq. ft. Weight loaded, 2651.9 lb. (6 hours). Weight bare, 1908 lb.

Body structure:

Details:	
Longeron, forward upper right	9.0 lb.
Longeron, rear upper right	9.0 "
Longeron, forward upper left	9.0 "
Longeron, rear upper left	9.0 "
Longeron, forward lower right	9.0 "
Longeron, rear lower right	9.0 "
Longeron, forward lower left	9.0 "
Longeron, rear lower left	9.0 "
Vertical posts, total	19.0 "
Rudder post	12.8 "
Horizontal posts, total	13.5 "
Engine beds (two)	19.0 "
Engine bed, supporting posts	4.0 "
Engine plates, total	19.0 "
Radiator supports	27.5 "
Fittings, total	27.5 "
Rivets, bolts, nuts, screws, total	7.1 "
Wire and cable, total with terminal clips and thimbles, etc.	21.1 "
Turnbuckles	10.0 "
Floor of cockpits	18.0 "
Tail skids	6.0 "
Body cover strips	7.0 "
Front and rear seats and supports	31.5 "
Cowling and body cover	59.5 "
Total	302.0 lb.

Percentage of total weight, 11.4%.

Chassis:

Details:	
Wheels and tires, 2 at 26" x 5"	57.0 lb.
Axles (1)	22.0 "
Struts (2)	25.0 "
Axle braces	8.5 "
Axle mounting and guides	12.0 "
Rubber shock absorber	2.5 "
Fittings	7.5 "
Wiring and turnbuckles	2.5 "
Fairing	1.5 "
Total	138.5 lb.

Percentage of total weight, 5.23%.

Wing group:

Details for upper wings:	
Front spar, total span 18' 5⅝"; 18' 8¾" length	25.5 lb.
Rear spar, total span 18' 9½"; 19' 0" length	23.5 "
Compression posts or solid ribs (7)	16.2 "
Lightened ribs and straps (10 long, 7 short), total	18.4 "
Entering edge, 4 pieces	8.0 "
Trailing edge, 4 pieces	3.9 "
Edge pieces and cross battens	5.5 "
Fittings	1.3 "
Wire, clips and turnbuckles	11.5 "
Linen, undoped, and tape and tacks for taping	15.4 "
Dope and varnish	6.5 "
Flaps uncovered, total	20.0 "
Flap hinges and hinge fittings, complete	1.1 "
Flap covering, dope and varnish	1.2 "
Unaccounted for	20.0 "
Total	178.0 lb.
Body wing section	16.5 lb.
Details for lower wings:	
Front spar, total span 18' 5⅝"; 18' 8¾" length	25.0 lb.
Rear spar, total span 18' 9½"; 19' 0" length	23.0 "
Compression posts or solid ribs (8)	18.5 "
Lightened ribs and straps (7 short, 9 long)	19.5 "
Entering edge, 4 pieces	8.0 "
Trailing edge, 4 pieces	3.9 "
Edge pieces and cross battens, hinge, block braces, etc.	5.5 "
Fittings	1.3 "
Wire, clips and turnbuckles	11.8 "
Linen, undoped, and tape and tacks for taping	15.9 "
Dope and varnish	6.3 "
Flaps uncovered, total	20.0 "
Flap hinges and hinge fittngs, complete	1.1 "
Flap yokes and yoke fittings	3.8 "
Flap coverings, dope and varnish	1.2 "
Unaccounted for	25.3 "
Total	190.0 lb.

	Weight	Area	Weight per sq. ft.
Upper wings	178.0 lb.	262 sq. ft.	.680 lb.
Body section	16.5 "	18 " "	.920 "
Lower wings	190.0 "	262 " "	.720 "

Total wing weight..... 384.5 lb.
Percentage of total weight, 14.52%.

Interplane struts, fittings, and wiring: 107.6 lb.
Weight per square foot of wing area..... .203 "
Percentage of total weight, 4.06%.

Tail surfaces:

	Weight	Area	Weight per sq. ft.
Vertical fin complete, covered and varnished	3.0 lb.	5 sq. ft.	.600 lb.
Vertical rudder	9.0 "	10 " "	.900 "
Fixed horizontal tail	20.3 "	32 " "	.635 "
Elevators	21.0 "	23 " "	.915 "
Total	53.3 lb.		

Percentage of total, 2.0%.

Control system:

Combined Curtiss and Dep. control, with Control operators in rear cockpit only	26.2 lb.
Control wires, wiring and switches	4.4 "
Total	30.6 lb.

Percentage of total weight, 1.15%.

Gasoline and oil:

Gasoline for 6 hours	396.00 lb.
Oil for 6 hours	33.5 "
Total	429.50 lb.

Percentage of total, 16.2%.

Tanks:

Tanks and connections and supports (68 gallons fuel)	78.5 lb.

Percentage of total, 2.95%.

* This Course commenced in the August 1, 1916 issue of AVIATION AND AERONAUTICAL ENGINEERING will be completed in 24 issues.

Engine group:

Radiator, complete and connections without water	46.0 lb.	Weight of radiator per hp	.34 lb.
Engine, complete without propeller, radiator or any water, any oil, long exhaust tube or self-starter	558.5 "	Engine weight per hp	4.15 "
Water for radiator piping and jackets (30 lb. carried in radiator alone)	93.8 "	Water weight per hp	.695 "
Propeller complete and bolts	27.5 "	Propeller weight per hp	.202 "
Long exhaust pipe	13.0 "		
Total	738.8 lb.		

Percentage of total weight, 27.77%.

Passenger and equipment:

Pilot	165.0 lb.
Passenger	165.0 "
Total	330.0 lb.

Percentage of total, 12.5%.

Equipment:

Instruments and instrument board, and accessories compiled for rear cockpit	22.7 lb.
Same for front cockpit	9.2 "
Side pockets, both sides	3.0 "
Camshaft oiler	4.1 "
Speaking tube	2.8 "
Pyrene and brackets complete	6.7 "
Oil pressure line and sight oil	2.8 "
Tool kit and case complete	7.3 "
Total	68.6 lb.

Percentage of total weight, 2.20%.

Summary of Weight Distribution for Standard H-3

Group	Weight	Percentage of Useful Load
Body assembly and equipment	370.5 lb.	13.60%
Chassis	138.5 "	5.23%
Wing group	384.5 "	14.52%
Interplane bracing	107.6 "	4.06%
Tail surfaces	53.3 "	2.00%
Control system	30.6 "	1.15%
Gasoline and oil	429.5 "	16.20%
Gasoline tanks and piping	78.5 "	2.95%
Engine group	738.8 "	27.70%
Passengers and equipment	330.0 "	12.50%
Totals	2651.9 lb.	100.00%

The Standard figures are fairly representative for this type of machine.

Percentage Table for Machines of About 2500 Lb.

In Table 2 are given figures compiled by Dr. J. C. Hunsaker for a number of typical machines. The percentage values seem to hold very closely for machines of the large tractor type.

TABLE 2

	Per cent
Useful load:	
Personnel and equipment	13.1
Gasoline and oil, 6 hours	19.8
Engine weight:	
Tanks and pipes	3.3
Engine and accessories	17.9
Radiator (empty)	2.2
Cooling water	1.7
Propeller and hub	1.0
Structural weights:	
Body	8.2
Landing carriage	8.2
Directive surfaces	4.1
Wings	16.5
Wing bracing	4.0
Total useful load	32.9
" engine weight	26.1
" structural weight	41.0
	100

Weight Distribution for a Typical School Machine

Figures can be published for the Curtiss JN-4. Data was given in Section 1 for the JN-4B, but the difference between the two types is very slight.

Curtiss JN-4. OX 90 hp engine. Maximum speed 75 mph. Minimum speed 43 mph. Climbing speed 3000 ft. in 10 min. Total wing area, including wing flaps, 367.0 sq. ft. Weight loaded, 1902.35 lb. Weight bare, 1281.5 lb. 4.4 hours fuel.

Part:	Weight
Body assembly	290.00 lb.
Tail skid with rubber elastic cord (3 ft.)	2.75 "
Cushions	3.50 "
Total	296.25 lb.

Percentage of total load, 15.50%.

Chassis:

Details:

Landing gear braces with fittings	28.5 lb.
Axle	15.75 "
2 Aluminum bearings for shock absorbers and straps	2.00 "
2 Rubber shock absorbers (elastic cord 37 ft.)	3.50 "
2 Wheels 26" x 3" tire and 1½" hub	27.00 "
Total chassis group	76.75 lb.

Percentage of total weight, 4.03%.

Wing group:

Part	Weight	Area	Weight per sq. ft. of surface
Upper wings without flaps or fittings	120.00 lb.	172.2 sq. ft.	.772 lb.
Upper center section without fittings	13.00 "		
Lower wings without fittings	112.00 "	152.2 " "	.736 "
2 wing flaps with fittings	24.50 "	40.8 " "	.600 "
Total for wing group	269.50 lb.		

Percentage of total weight, 14.15%.

Wing bracing and fittings:

Details:

Part	Weight
Upper wing fittings, 8 strut fittings, 4 fittings to center section	10.50 lb.
Lower wing fittings, 8 strut fittings, 4 fittings to body	9.50 "
2 Wing skids	2.25 "
4 Outer section struts (length of staggered struts = 61").	13.50 "
4 Intermediate section struts	17.50 "
4 Drift wires to nose from upper and lower planes	3.00 "
Flying landing and outer strut wires (not including center section)	24.00 "
4 Aileron wires with fittings	5.00 "
4 Short uprights for bracing overhang	1.00 "
Center section struts	4.50 "
Center section brace wire	3.50 "
Total	94.25 lb.

Percentage of total load, 4.95%.

Tail surfaces:

	Weight	Area	Weight per sq. ft. of area
Vertical tail fin and fittings	14.00 lb.	2.5 sq. ft.	0.62 lb.
Rudder and fittings	10.00 "	10.2 " "	1.02 "
Fixed horizontal tail with hinge fittings only	14.00 "	22.7 " "	0.62 "
2 Elevator flaps with wires and posts	14.50 "	17.5 " "	0.83 "
Total	52.50 lb.		

Percentage of total, 2.76%.

Control system:

Steering post, rudder wheels with rudder wires and fittings	12.25 lb.
4 Elevator wires	3.50 "
Total	15.75 lb.

Percentage of total weight, .83%.

Gasoline and oil:

4.4 hours	252 lb.

Percentage of total load, 13.20%.

Tanks:

	Weight	Weight of tank per gallon
Gasoline tank with capacity of 37 gall.	28.1 lb.	.76 lb.

Percentage of total weight, 1.53%.

Engine group:

Propeller and hub	34.75 lb.	Weight per hp	.386 lb.
Engine and accessories (including 2 hot air stoves, 3.75 lb., top of engine plates and side plate, 20.15 lb.)	363.75 "	Weight per hp	4.050 "
Radiator	55.75 "	Weight per hp	0.620 "
Water	39.00 "	Weight per hp	0.430 "
1 Water pipe and fittings	3.00 "		
Total	496.25 lb.		

Percentage of total weight, 26.10%.

Passengers:

Pilot	156 lb.
Passenger	165 "
Total	321 lb.

Percentage of total weight, 16.95%.

Summary of Weight Distribution for JN-4-B

	Weight	Percentage of total load
Body assembly and equipment	296.25 lb.	15.50%
Chassis	076.75 "	4.03 "
Wings	269.50 "	14.15 "
Interplane bracing	094.25 "	04.95 "
Tail surfaces	052.50 "	02.76 "
Control system	015.75 "	00.83 "
Gasoline and oil	252.00 "	13.20 "
Gasoline tank and piping	028.10 "	01.53 "
Engine group	496.25 "	26.10 "
Passengers	321.00 "	16.95 "
Totals	1902.35 lb.	100.00%

Empirical Formulas and Values for Weight Estimates

Some empirical formulas and values are given here. Such empirical formulas can never be entirely trustworthy, since so much depends on the type of machine to be constructed, the type of construction to be employed for any particular part of the machine, and the factor of safety desired. Much greater reliance is to be placed on direct comparisons from actual machines and on actual computations from drawings.

Still, they may serve a useful purpose in the preliminary stages of design, when a rapid estimate is needed.

(1) *Body*

Bare rectangular wooden longeron body, with fabric covering for small monoplane and biplane scouts about 1200 lb. total weight, 70 lb. is a good average figure. For large biplanes about 2500 lb. total weight, 150 lb. is a liberal allowance.

(2) *Seating*

About 10-12 lb. per person is sufficient.

(3) *Single control system 30 lb.*
Double control system 50 lb.

(4) *Landing Gear*

A landing gear of about $^1/_{10}$ the loaded weight of the machine can be easily designed.

(5) *Tail skid*

Is roughly $^1/_{20}$th the weight of the landing gear.

(6) *Main plane weights (surface alone)*

A fair average figure is 0.75 lb. per square foot of wing area, although wing weights will vary with size of machine, section employed, aspect ratio, strut spacing and numerous other features in design.

(7) *Weight of control surface*

Control surfaces with fittings and hinges may, with careful design, not exceed 0.5 or 0.6 lb. per square foot.

(8) *Tanks*

About 0.75 lb. to 1.00 lb. per gallon.

(9) *Engine weights, fuel consumption*

Full values for these are available and will be given in a subsequent section.

(10) *Engine mounting*

One-eighth of the engine weight for a rotary type and one-twelfth the engine weight for a fixed type engine.

(11) *Propellers*

A good rule is weight $= 2.5\sqrt{\text{hp.}}$

(12) *Radiators*

For radiators, manufacturers' figures will be given later, and empirical formulas are not necessary.

(13) *Passengers*

Some 10 lb. should be added for aviation dress.

(14) *Miscellaneous*

An allowance of 10 lb. is sufficient for instruments, such as compass, altimeters, etc. Fire extinguisher, 8 lb. Tool kit, 5 lb. First-aid kit, 5 lb.

(15)

In a subsequent section we shall deal with weights of such parts of the machine as cables, wires, turn-buckles, fabrics, dopes, wheels, etc., etc.

Some General Considerations on Distribution of Weight and Useful Load

F. W. Lanchester has approached the question of weight distribution for various sizes of machines in a very interesting article. The subject offers many difficulties, and the following

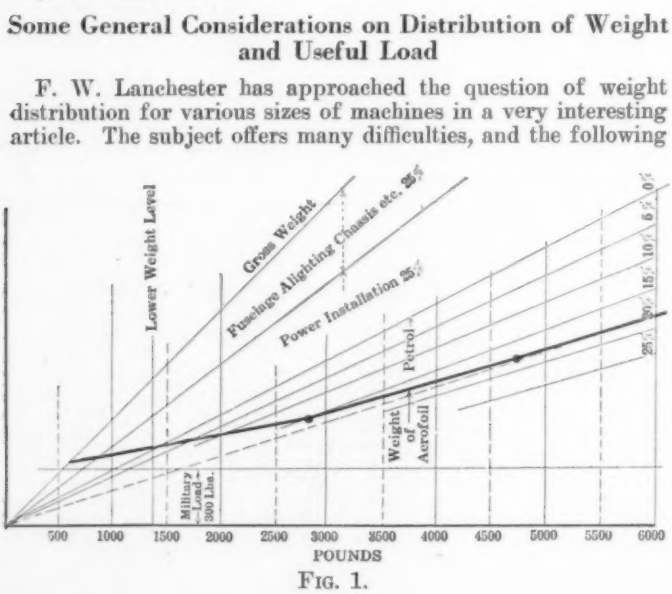

FIG. 1.

notes, mainly based on Mr Lanchester's article, are merely an introduction.

When estimating the structural weight of a new machine from data available on one constructed, certain theoretical considerations are available.

Simple and reasonable assumptions in dealing with the main planes are that the wing section remains geometrically similar, and the velocity constant. On such a basis from ordinary considerations of aerodynamics, the span must vary as the square root of the gross weight, and conversely the loading on the wing will vary as the square of the span. The direct forces of tension and compression on the spars will vary directly as the loading and square of the span, but the cross-sectional areas of the spars will also vary as the square of the span;

FIG. 2.

geometrically similar wings will, therefore, be equally strong as regards direct forces. The bending moments will vary as the gross weight or loading multiplied by the span, i.e. as the cube of the span. But the resisting moment of the spars will vary as the section modulus or cube of the linear dimensions; geometrically similar wings will, therefore, be equally strong as regards bending moments. It follows that with constant velocities geometrically similar wings will be equally strong for both direct and bending stresses. From the weight of aerofoil point of view, the position is unfavorable, since the weight will vary as the cube of the linear dimensions or cube of the span.

It follows that the weight of the wings will vary as $W^{4/3}$ where W is the gross weight.

In the interplane bracing, the wires, which only take direct stresses, will be equally strong when geometric similarity is maintained. For the struts just as for the spars, the same will apply. Therefore, the interplane bracing will also vary as $W^{5/3}$.

For the body it is possible to make the somewhat more favorable assumption that its weight is directly proportional to the gross weight. With increase in span, it is by no means necessary to increase the arm of the tail surfaces proportionately, while the resisting moment of a body cross-section varies as the depth squared and the breadth. Current practice also seems to bear out the above assumption. It might even prove to be true that on large machines a slight saving on weight of body would be possible.

The shock of landing to be taken up by the chassis depends, for the same landing speed, on the gross weight.

If a chassis for a large machine were geometrically similar to that of a smaller machine, it would probably show greater strength in the struts, and equal strength in the shock absorber. The question is very complex. Mr. Lanchester insists on the analogy of the greater relative diameter of the legs of such a large animal as an elephant as compared with the legs of a flamingo. But with very big landing gear so much becomes possible in the way of shock absorption that keeping the weight of the chassis a constant proportion of the gross weight seems feasible.

For the power installation, no general discussion seems possible, and Mr. Lanchester has assumed this to be 25 per cent of the gross weight in the graphs of Fig. 1 and Fig. 2.

The construction of these is easily followed. The bounding line of these curves is drawn at 45° to the Case line, 5° that its ordinates represent the gross weight, just as the abscissae for the same point represent the gross weight. In accordance

with the above considerations, the total structural weight is taken as a constant proportion of the gross weight, namely, 25 per cent. The power installation weight is taken as 25 per cent, as previously mentioned. The weight of aerofoil curve, varying as $W^{3}/^{2}$, is obtained from present-day English practice in biplane construction, with a factor of safety of 6—somewhat lower than American practice. The military load is kept at 500 lb. in one case, at 150 lb. in the other, and the remainder is allotted to the supply of petrol.

The above remarks, the distribution of weights, and these two curves are open to criticism. However, they are the conclusions of a most eminent authority, and may serve as a useful guide in the preliminary design of a machine, particularly as regards possible endurance, which can at once be derived from the petrol capacity. They also give an idea of the limitations of the airplane. Thus the curves of Fig. 1 show the lowest possible weight level, with a big load of 500 lb., and if extended to greater gross weights would show where, with increased size, the petrol capacity begins to diminish. Fig. 2 would be particularly useful in considering the possibilities of a speed scout with a single passenger.

References for Part 2, Section 3.

"THE DEVELOPMENT OF THE MILITARY AEROPLANE"
by F. W. Lanchester, *Engineering*, March 3, 1916.

ERRATUM

A serious error was made in Part 2, Section 1. The figures for the Standard H-3 should read:

Weight loaded, 2700 lb.
Weight bare, 1900 "

Corresponding corrections should be made in loading per horsepower and per square foot of wing area.

Book Reviews

THE ESSAYS OF AN AVIATOR

(London: *Aeronautics*, 170 Fleet Street, E. C.)

This work is published anonymously for reasons which are best stated in the author's words:

"Wrapped in the cloak of anonymity I have crept into these pages and taken up again the pen I thought I had discarded for ever. It is a good feeling. Up in the air one loses identity, or, rather gives it to the machine. A man animates the clothes he is wearing much more than the clothes submerge their personality in him. And so in the air one becomes merely a complex piece of mechanism, the soul of an airplane, some say, but as others more truly phrase it, the slave of a machine."

It makes fascinating reading, under striking subtitles: "Of beginnings, of anticipation, of history, of education, of art, and of war."

Readers seeking technical information will not find it; but a philosophic, almost poetic study of the effects of this newest achievement of man makes a most charming diversion from our usual reading!

AERONAUTICAL ENGINES

By F. J. Kean

(Spon and Chamberlain, New York, N. Y. 98 pages, 31 plates, $2.00.)

This book is the outcome of a course of ten lectures given by the author in London to men of the Royal Navy Air Service, Royal Flying Corps, designers and engineering students.

Mr. Kean is very careful to point out in his preface that in his lectures he was teaching—not merely lecturing, and the book demonstrates this thoroughly.

Very little new information is to be found in the volume, but it will be invaluable to anyone making early studies of aeronautical engines. Such subjects as carburetion, ignition and balancing are treated from fundamental principles in the most authoritative fashion. The illustrations are very apt and the text follows them closely.

FLYING MEN AND THEIR MACHINES

By Clarence Winchester ("Ornis")

(Price $2.50 net. E. P. Dutton & Co., New York, N. Y. 242 pages)

This book is an excellent sample of popular books on aviation, and contains an interesting short biographical notice of such well-known pilots as Pemberton-Billing, Blériot, Hamel, and others. An interesting account is given of Warneford's destruction of Zeppelins and of other exciting adventures.

The chapter on "How Aeroplanes Fly" should be particularly valuable for those first taking up the subject of aviation. The section devoted to aeroplaning, trick flying, and cross-country flying might make useful reading for pupils at flying schools.

"The Naval Flying Corps Monthly"

A newcomer in the field of aeronautical publications has been received at the office of AVIATION AND AERONAUTICAL ENGINEERING. It is called *The Naval Flying Corps Monthly*, and is published at the United States Navy Aeronautic Station, Pensacola, Fla. The editors have wisely started their adventure without too pretentious beginnings, but the quality of the first issue gives promise of even better things to come. Besides giving the news of the station, the magazine contains

(C) International Film Service.

MISS KATHERINE STINSON IN JAPANESE COSTUME

articles both humorous and serious, which should be of interest to all who wish to keep in touch with the personalities as well as the developments in the industry.

The table of contents of the first issue is as follows: "Our Title," "Efficiency in Flight," "The Retreat from Agua Calientes," "The Aeronut's Cycle of Virtue," "Altitude Effect on Motors," "Station News" and "Side Slips." AVIATION AND AERONAUTICAL ENGINEERING extends a hearty welcome to the newcomer.

Aeronautical Patents

Copies of these patents may be obtained for five cents each by addressing the "Commissioner of Patents, Washington D. C."

ISSUED FEBRUARY 20, 1917.

1,216,577. Filed Aug. 23, 1912. To James S. Lang, Boston, Mass. A flying machine.

1,216,652. Filed April 8, 1916. To Antonio Borras and Fernando Iriarte, Buenos Aires, Argentina. An airplane.

ISSUED JANUARY 27, 1917.

1,217,518. Filed January 21, 1914. To Max Singelmann, Chicago, Ill. An airship.

1,217,679. Filed July 2, 1913. To Rene Arnoux, Paris, France. Anemometric regulator for airplanes.

1,217,657. Filed April 11, 1916. To Joseph A. Steinmetz, Philadelphia, Pa. Method of destroying aircraft.

1,217,169. Filed March 12, 1915. To Oskar Grauheding, Dusseldorf, Germany. Telescope-sight for airships and flying machines.

MARCH 6, 1917.

1,218,586. Filed June 25, 1915. To Joseph A. Steinmetz, Philadelphia, Pa. Destruction of submarines.

1,218,387. Filed May 1, 1916. To Chauncey B. Forward, Jr., and Louis D. Forward, Urbana, Ohio. An airplane.

1,218,456. Filed Jan. 17, 1916. To Charlie Peterson, Florence, Wis., assignor of one half to Harvey Bowman, Florence, Wis., and Charles Erickson, Commonwealth, Wis. An airship.

1,218,330. Filed March 22, 1916. To Justus M. Smith, Oakhurst, N. J. Toy parachute.

Air Maneuvers at Mineola

Squadron flying and air maneuvering were inaugurated at the Mineola flying field under the direction of Captain J. E. Carberry on Wednesday, March 7. Hereafter it is the intention of the authorities who are organizing the First Aero Squadron, Signal Reserve Corps, to hold squadron maneuvers every Saturday afternoon.

The first problem was undertaken under conditions of remarkable difficulty as the ground was covered with deep snow, slightly crusted. In places the crust was not sufficiently strong to bear the weight of an airplane and a runway had been shoveled in the snow for starting and landing.

The maneuver problem was a simple one, drawn up with a view to instructing the applicants for commissions in the Signal Officers' Reserve Corps, Aviation Section in the correct methods of making military reports.

The problem as issued by Captain Carberry read as follows:

AIR PROBLEM NO. 1

It is assumed an unknown number of enemy aircraft have left Tangier, L. I., with the intention of photographing our encampments in the vicinity of Mineola. Information is desired as to the number, type and movements of these aircraft. For the purposes of the problem all observers will report in writing at the conclusion of the assigned tour of duty, delivering reports in person at headquarters.

An enemy airplane fleet, simulated by three L. W. F. machines piloted by Leonard Bonney, A. Livingston Allan and Harold Blakely, all student instructors at the Mineola Army School, left the field about 3 o'clock with instructions to attempt to return after half an hour without being seen by the cordon of defenders.

Half an hour after the "enemy" had left the field fifteen "defending" airplanes were sent up with orders to patrol across Long Island from Oyster Bay to Freeport.

Everything seemed to go wrong at the start. In the first place word was sent that a squadron of airplanes from Governor's Island, which had been expected to act as the enemy air fleet, would not take part because they could not rise from the snow at their station. It was then decided to use three of the L. W. F. machines at the school to represent the enemy.

So bad was the condition under foot that it was found impossible to get a heavy automobile through the snow to the L. W. F. hangars on the opposite side of the big field from headquarters, to carry the pilots to their machines. It was necessary to take them over in airplanes. For the first time in history, perhaps, an air machine was called to do a job of transportation that a land truck could not handle.

18 MACHINES FOR MANEUVERS

By 3 o'clock things were ready. There are thirty-five machines now at the school, but only eighteen were used in maneuvers. All these, however, were out in front of their hangars in the snow.

Soon a few machines began to go up to "feel out the air." One of the first of them was the Curtiss machine, No. 171, with Student Instructor A. W. Briggs, formerly a captain in the Royal Flying Corps of Great Britain, as pilot and Bert B. Acosta, the former Curtiss instructor, as observer. Capt. Briggs rolled up to the shoveled pathway and then swept along it for the take off.

He had gone about 100 yards and was just lifting from the ground when a sudden gust of wind hurled his machine into a mound of snow alongside. The tip of the lower plane caught in the embankment and the machine turned turtle. The propeller was broken. Neither Briggs nor Acosta was injured.

Photo by Central News Photo Service.

LANDING IN THE SNOW AT MINEOLA

RISING FROM THE SNOW

Thereafter the pilots avoided the shoveled pathway. Someone discovered that he could get off right from the field. Thereafter they all did it. The machines landed on the snow, too. This required extremely difficult pancake landings, as anything like a tail high landing would have been sure to cause the machine to nose over and turn upside down.

About 6 o'clock the first of the enemy planes returned to the field. The defenders flew for the most part at from 4,000 to 6,000 feet. Allan, flying at a height of 9,600 feet, came in over Hicksville. He had seen a number of the home air fleet, but came through with only a few of them having been able to distinguish him by the black and white stripes painted on the body of his airplane. Bonney, flying at 8,200 feet, passed over the cordon and so did Blakeley, who kept lower.

The three biplanes were "spotted" by a number of the pilots, who were instructed to turn in reports in writing.

NOT A PUBLIC EXHIBITION

The work was not an exhibition, for the school is under military control and the general public is not allowed inside the gates. It was a maneuver pure and simple, its purpose being partly to test the men and partly to determine the possibilities of an aerial attack on the field, or nearby fortifications and even on New York. Similar tests are to be held every Saturday during the coming Summer.

The Aviation Section of the Signal Corps is expected to organize a Reserve Pursuit Squadron under command of Captain R. C. Bolling, S. O. R. C., at a field adjoining the Army schooling field at Mineola. The commissioned personnel of this squadron will be picked by Captain Bolling from those officers and enlisted men of the 1st Aero Company, N. G. N. Y., who learned to fly at Mineola last summer as well as the Governor's Island fliers.

The following Lieutenants of the Signal Officers' Reserve Corps piloted "defending" machines in the March 7 maneuver: Ivan P. Wheaton, A. J. Coyle, L. V. Smith, W. P. Willetts, H. H. Salmon, Jr., R. M. Olyphant, Daniel Morse, H. F. Wehrle, Charles Post, Havilock Simon and W. H. Watkins and Instructors Briggs, Millman, Bjorklund and Norton.

Other commissioned officers who will probably be with the First Reserve Squadron will include Captains R. C. Bolling, Philip A. Carroll, Charles Read, and James E. Miller and Lieutenants J. E. Stevenson, Alexander Blair Thaw, D. G. Frost, Cord Meyer and D. R. Noyes.

New Altitude Record

The Aero Club of Italy has just homologated a new altitude record of 25,180 feet, which was established on November 7, 1916 by Guido Guidi, an aviator who was flying a twin-engined Caudron. The record indicates the height above the camp, — Mirafiori near Turin, — which Guidi reached. The altitude above sea level he attained was 26,082 feet. This performance sets a new world's record for airplane altitude achievements. The best previous performance was made by H. G. Hawker, a British flier in April, 1916. He reached a height of 23,905 feet.

Mr. Boeing Presents Wind-Tunnel

Mr. W. E. Boeing, of Seattle, has presented to the University of Washington a fully equipped research laboratory in aero-dynamics to further research of the scientific side of aeronautics. The laboratory will be one of three of its kind in the United States and will consist principally of a steel lined wind tunnel approximately six feet square and seventy-five feet long. The new laboratory will be located in one of the buildings of the engineering group.

Count Ferdinand von Zeppelin

Count Ferdinand von Zeppelin died at Charlottenburg, Prussia, on March 8, 1917, in his seventy-ninth year. Born at Lake Constance in 1839 he was a soldier until his retirement from active military command in 1891. When he retired the Count held the rank of General of Cavalry.

The first lighter-than-air craft with which Count von Zeppelin had practical experience was one owned by the Union Army in the American Civil War. Count von Zeppelin was military attaché with the Union Army during the war. He made one or two ascents in a captive balloon which was in use by the Army of the Mississippi in 1863.

It was not till 1874, however, that Zeppelin began preliminary experts on dirigible balloons, and he did not commence construction work until he had retired from the Army. Originally the Zeppelin was meant to assist the Post Office, but its reconnaissance value was also appreciated. In starting his work Count von Zeppelin said:

> I intend to build a vessel which will be able to travel to places which cannot be approached by other means of transportation, and for observations of hostile fleets and armies, but not for active participation in actual warfare. My dirigiole balloon must be able to travel several days without renewing provisions, gas or fuel.

To-day, when Zeppelins are adjudged failures in the popular estimation it is interesting to recall that before he had ever built a single airship Count von Zeppelin realized and stated that they were not built for offensive operations.

When the Count began his work he had to take many pioneering steps. He decided that a gas volume of at least 400,000 cubic feet was necessary for his purposes. Such a volume was unheard of at that time and it necessitated the introduction of rigid construction. Wood and steel were considered but finally aluminum was adopted for the interior structure.

In 1900, despite the jeers of the German people, the first Zeppelin was completed. Its dimensions were:

Diameter	38 ft. 1 in.
Length	419 ft. 10 in.
Largest cross section area	1,140 sq. ft.
Gas capacity	400,000 cu. ft.

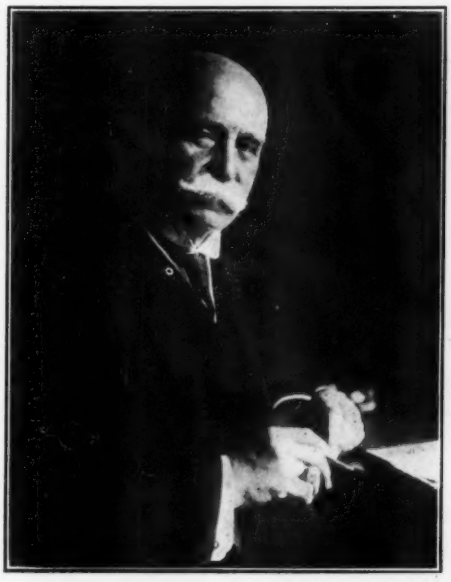

(C) Underwood and Underwood

This machine has been called the work of a "rank amateur" and the work of a soldier who was not a trained engineer. As a matter of fact it was the work of a man whose hobby had been lighter-than-air craft from 1874 to 1891 and whose time had been wholly devoted to practical application of his theoretical knowledge from 1891 to 1900.

The first Zeppelin could hardly have been called a success. Its structure stood up, it lifted its calculated load, but its primitive power plant and steering rudders failed. The machine was wrecked.

But Count von Zeppelin was not discouraged. The first airship, with all its faults, furnished a good basis for the development of the rigid system. While the popular impression, frequently voiced, was that Count von Zeppelin had "water on the brain" he continued to expend his time and money in scientific and systematic experimentation.

Popular scoffing stopped suddenly in 1907 and the pendulum swung in the other direction. Emperor William said of Zeppelin: "He is the greatest German of the twentieth century" when the inventor brought the Zeppelin III literally to His Majesty's feet after a successful flight of over two hours. The Reichstag gave him $125,000 to continue his experiments. He was permitted to use the profits of a public lottery to increase his funds.

Before the war broke out Count von Zeppelin had built the Sachsen type of dirigible. It is interesting to compare the Sachsen of 1914 with the first rigid dirigible of 1900. The Sachsen's dimensions were:

Diameter	48 ft. 6 in.
Length	478 ft. 9 in.
Gas capacity	735,000 cu. ft.

Since the war military requirements have dictated attempts to use Zeppelins offensively. This has resulted in the building of Zeppelins of the following dimensions:

Diameter	75 ft. 5 in.
Length	787 ft.
Gas capacity	1,130,000 cu. ft.
High speed	75 m.p.hr.

At the outbreak of the Great War in 1914 the German people looked to Count von Zeppelin's inventions to bring their enemies to their knees. Count von Zeppelin's death, following closely upon the practical abandonment of Zeppelin warfare, was probably hastened by the failure, offensively, of his aircraft.

Navy Lets Contracts for 16 "Blimps"

The Navy Department announced March 12th purchase of 16 non-rigid dirigibles, in accordance with bids which were opened on March 6th to specifications which were published in AVIATION AND AERONAUTICAL ENGINEERING of March 1st.

The Curtiss Aeroplane Co., was awarded contracts for 3 "Blimps" at $40,750 each; The Connecticut Aircraft Co., two at $42,000 each; The Goodyear Tire and Rubber Co., nine at $40,000 each, and The B. F. Goodrich Co., two at $41,500 each. According to the contracts deliveries are to begin within 120 days.

The machines are to operate from shore bases, but could rest on the water in good weather. The gas bags will be 160 by 31 feet. Each dirigible will carry two men, and will be equipped for radio communication. They will have 100 hp. engines, a safe altitude limit of 7,500 feet and at 600 feet a maximum speed of 45 m.p.h. for ten hours. At 35 miles an hour they will carry fuel for sixteen hours running.

Lieut.-Col. Bennett to Head Aviation Section

Lieutenant-Colonel James B. Bennett, a recent graduate of the San Diego course in aviation for field officers, has been chosen for Officer in Charge of the Aviation Section, to succeed Brigadier General Squier, the new Chief Signal Officer.

General Squier will continue to supervise the work of the Aviation Section.

Christofferson Plant to Re-Open

The Christofferson Aircraft Manufacturing Company's plant at Redwood City, Cal., which has been closed since the death of Silas Christofferson a few months ago, is about to re-open, according to newspaper reports from the Pacific Coast.

At a recent meeting attended by representatives of San Francisco capital, Lansing Tevis, president of the Christofferson Aircraft Manufacturing Company, and E. T. McGettigan, manager of the Redwood City Chamber of Commerce, plans were adopted for reopening the plant upon an enlarged scale. A representative of the San Francisco capitalists is reported as having said:

> "The Christofferson plant will soon be running full blast and its output will be more than planes and engines. The plans of the people that I represent do not permit of my giving out names at present, but it is sufficient that they have the necessary capital, and they gave me instructions to go ahead and arrange with Mr. Tevis for the refinancing of the engine and airship corporations. The plant will not only be utilized as an up-to-date engine and airplane factory, but also for carrying out other far-reaching manufacturing plans."

Secretary of Manufacturers' Association

Benjamin L. Williams was appointed Secretary of the Aircraft Manufacturers' Association at a meeting held in New York City on February 27.

Small Airplanes with Big Engines

In an address before The Aeronautical Society of Great Britain on February 7, F. Handley Page, a British aeronautical engineer, produced an interesting technical paper in which he attempted to prove that there is no such thing as a "limiting size" to airplanes. The discussion which followed Mr. Page's paper is full of hints dealing with foreign practice and the trend of foreign design.

F. W. Lanchester, the chairman of the meeting, held that the present is the day of the small airplane.

The general trend of opinion may fairly be stated as being that structural weight must necessarily increase faster than the size of airplanes. There is therefore a limit to the possible size of airplanes.

An opinion which was held by Captain F. S. Barnwell, R. F. C., Wing Commander A. M. Longmore, R. N., and E. C. Gordon England was that the best land fighting machines were composed of the largest and lightest possible engine with the smallest possible fringe of airplane around it; that large airplanes are clumsier to handle and maneuver ability is what gives mastery of the air; that for war purposes big machines must be accompanied by protecting high-speed pursuit type airplanes and that big machines with several power units are more vulnerable than if they have centralized power systems.

Curtiss

MODEL VX-3 motor was used by Victor Carlstrom on November 2nd in flying from Chicago to Erie, Penna., a distance of 452 miles, in 3 hours 57 minutes.

Owing to changes and improvements our 5″ x 7″ eight-cylinder motor, formerly known as Model "VX," rated at 160 horsepower, will hereafter be known as Model "VX-3" and will be rated at 200 horsepower. The following is a record of electric dynamometer test of stock motor "VX-3" No. 3512 as delivered from the Production Department:

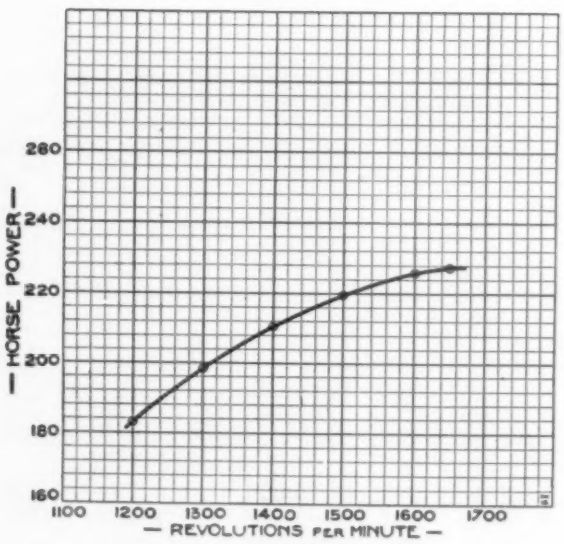

Duration of Test	1 hr.
Average R. P. M.	1403.33
Average Load on Scales (Lbs.)	449.64
Average Horsepower	**210.26**
Maximum Observed H.P. at 1400 R.P.M.	210.50
Minimum Observed H.P. at 1400 R.P.M.	208.10
Total Gas Consumption (Lbs.)	111.30
Total Gas Consumption (U. S. Gals.)	18.10
Gas Consumption per Hour (Lbs.)	111.30
Gas Consumption Per Hour (U. S. Gals.)	18.10
Gas Consumption (Lbs. per H. P. Hour)	**.528**
Total Oil Consumption (Lbs.)	6.50
Total Oil Consumption (U. S. Gals.)	.844
Oil Consumption (U. S. Gals. Per Hour)	**.844**
Oil Pressure Start of Test (Lbs.)	71.00
Oil Pressure End of Test (Lbs.)	72.00
Oil Pressure Maximum (Lbs.)	74.00
Oil Pressure Minimum (Lbs.)	68.00
Average Inlet Water Temp. (F.)	116.90
Average Outlet Water Temp. (F.)	140.50

CURTISS AEROPLANE & MOTOR CORPORATION

BUFFALO, N. Y.

Aeronautical US Rubber Goods

We Specialize in the Manufacture of

BALLOON FABRICS

and are also in position to furnish the following:

Clothing for Aviators

Warm Waterproof Windproof

Shoes for Aviators

Light Flexible Non-Slipping Waterproof

Mechanical Sundries

For Aeroplanes, Flying Boats, Etc., Etc.

Shock Absorbers Gasoline Hose Rubber Matting

United States Rubber Company

1790 Broadway, New York

The Company's new plant is equipped with the most modern facilities for filling orders for aircraft of

Standard and Special Designs

Land and water flying at door of factory

Main Office and Factory:

Lincoln Highway, near Passaic River

Telephone Market 9096

New York Office: 17 Battery Place

Telephone Rector 2461

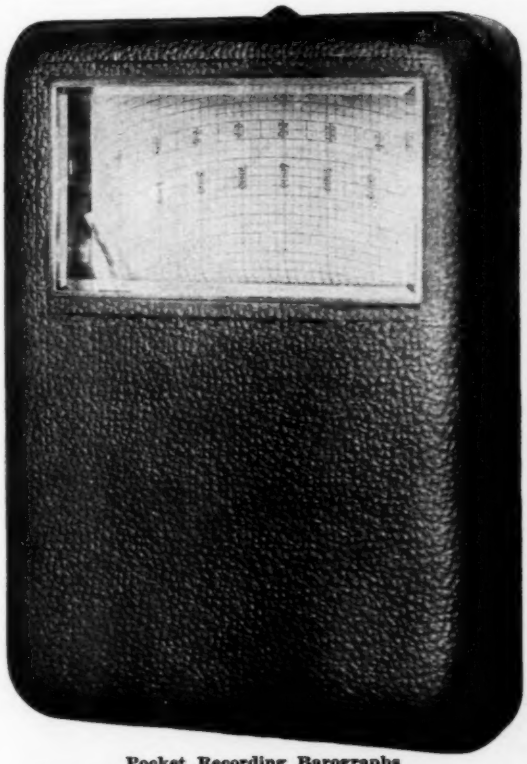

Pocket Recording Barographs

Size 4¾ x 3¼ x 1¼—4,000, 7,000 and 15,000 feet.

Especially adapted for school work, as the chart revolves once in one or three hours.

These instruments have been supplied to the United States Signal Corps and United States Navy.

A. HAUSTETTER, 308 Madison Ave., New York.

THE NEW WATER SPORT OF THE SUPERMAN

Instruction in a General Aeroplane Co's Verville Type Flying Boat will convert the ardent speed motor boat enthusiast to the virile man making sport of flying

"PREPAREDNESS"

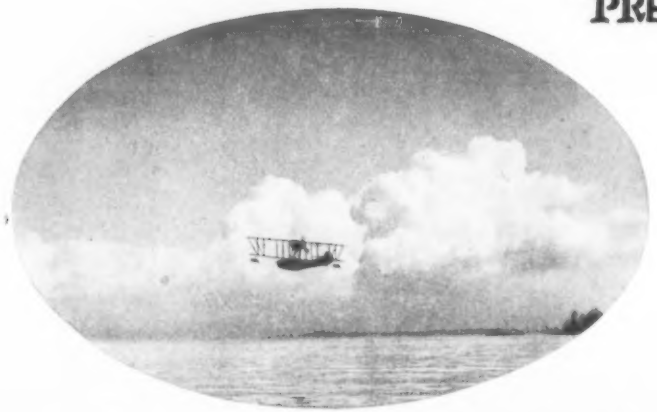

Office — 1507 East Jefferson Ave.

GENERAL AEROPLANE CO.
Detroit U.S.A

Hangars Old Detroit Motor Boat Site

THE

Ilanasilk

Aviator's Life Preserver

is designed to hold the head clear of water, and will support the heaviest person in water for over forty-eight hours. It is the lightest and most compact airplane life preserver obtainable, and permits unlimited movement of the arms. Soft and pliable, it affords real protection against injury from a fall. Adjustable to any sized person and worn over any clothing.

Write for further particulars, also our booklet "Safety on the Water" illustrating Ilanasilk Patrol Life Preserver (U. S. Navy type), Everready Safety Cushion, Camp and Canoe Mattress, and other life saving equipment.

Universal Safety Mattress Co., Inc.
Dept. AA
31 Nassau Street
New York

John L. Alcock & Co.

Baltimore, Maryland

WEST VIRGINIA SPRUCE

PACIFIC COAST SPRUCE

SILVER SPRUCE

Clear Quality

All Lengths and Sizes

Aeroplane Stock Specialties

Immediate Shipment from Stock

The Dirigible

Not even the swift perfecting of monster airplanes obscures the dominance of the dirigible in certain sectors of man's battle for mastery of the air.

Its brightest future may lie over the unending struggle on the seas, or it may be waiting above-land in trade routes for aerial caravans.

The dirigible's assured stability and exceeding range are the warrantors for its continuing progress.

To the American development of this mighty instrument, the Goodyear Department of Aeronautics is giving its effort without stint.

The Goodyear success with internationally-honored sphericals, as well as with naval and military balloons of other types and sizes, is only an earnest of Goodyear accomplishment.

We are ready to contract for dirigible construction.

Our department of aeronautics will gladly answer questions and give technical information concerning the operation of both lighter and heavier-than-air equipment.

* *

The Goodyear Tire & Rubber Company manufactures Rubberized Fabrics, Spherical, Kite and Dirigible Balloons of any size or type, and for any purpose—sporting, exhibition, military or naval—Airplane Tires, Tubes, Rubber Bumpers, Rims and other aeronautical supplies

The Goodyear Tire & Rubber Co.
Akron, Ohio

GOODYEAR
AKRON

Dependability!

An unfailing and instantaneous response to any emergency demand is assured by the 1917

Indian Motocycle
With Powerplus Motor

Perfectly adapted to the requirements of the aviation arm of Uncle Sam's fighting machine. The greatest speed, power, simplicity, strength, and positiveness of day-in-and-day-out perfect performance.

Demonstrations of 1917 Indian models will gladly be arranged for interested military officials.

Illustrated 1917 Indian Catalog and other descriptive literature sent anywhere on request.

HENDEE MANUFACTURING COMPANY

(Largest Motorcycle Manufacturers in the World)

859 STATE ST., SPRINGFIELD, MASSACHUSETTS

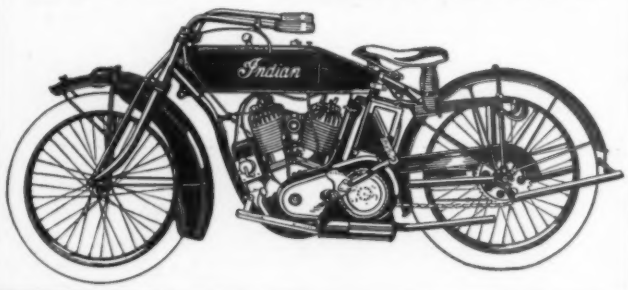

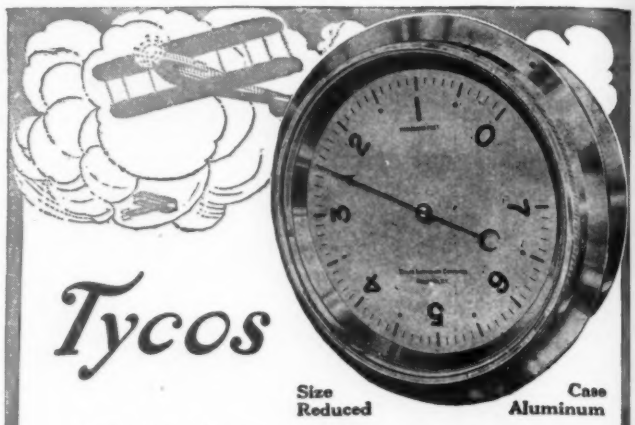

Tycos

Size Reduced

Case Aluminum

Aviation Barometer

Made in United States.

Movement compensated to overcome changes in temperature. Dial revolves so zero of altitude can be set at the hand at start of flight without showing error, as scale is equally divided.
Supplied to U. S. Navy, U. S. Signal Corps, leading manufacturers and to different Foreign Governments.
In material, workmanship, pride of manufacture, no effort is lost, no expense spared to make this Barometer worthy of the Tycos Reputation.
Let us submit information on this Barometer as well as on Inclinometers and Pocket Altitude Barometer—the purchasing we leave to your discerning judgment.

Taylor Instrument Companies

Rochester, N. Y. U. S. A.

For sixty years makers of scientific instruments of superiority

THE
GENERAL ORDNANCE COMPANY

NON-RECOIL GUN

There are hundreds of these guns being used Abroad in the War on

AIRPLANES
MOTOR BOATS
AUTOMOBILES

SOLE MANUFACTURERS (DAVIS PATENTS)

THE GENERAL ORDNANCE COMPANY

DERBY, CONN., U. S. A.

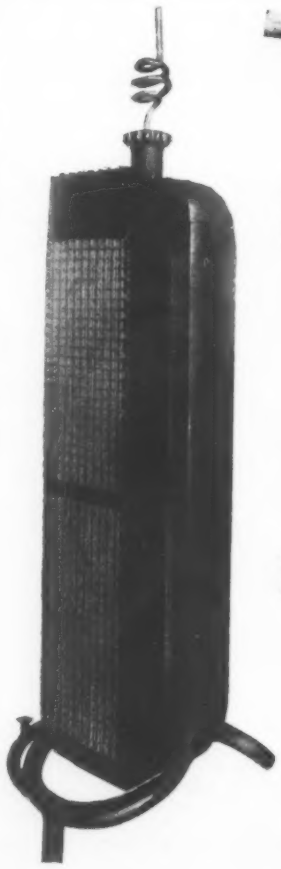

AJAX
Auto and Aero
Sheet Metal Co.

Manufacturers and designers of

AERO
RADIATORS
INTAKE
and
EXHAUST PIPES

LINDER & MEYER
245 W. 55th St.
New York



Factors of Safety

These Count in Aeroplane Construction

NON-INFLAMMABLE

Cellulose Acetate Base

Celestron Cloth Varnishes

provide another SAFETY FACTOR

NON-INFLAMMABLE

Celestron Sheets AND Films

Transparent — Waterproof

MANUFACTURED BY

Chemical Products Company

93 Broad Street Boston, U. S. A.

Manufacturers of Cellulose Acetate for nearly 15 years

Fahrig Anti-Friction Metal

The Best Bearing Metal on the Market
A Necessity for Aeroplane Service

Fahrig Metal Quality has become a standard for reliability. We specialize in this one tin-copper alloy which has superior anti-friction qualities and great durability and is always uniform.

When you see a speed or distance record broken by Aeroplane, Racing Automobile, Truck or Tractor Motor, you will find that Fahrig Metal Bearings were in that motor.

FAHRIG METAL CO., 34 Commerce St., N.Y.

TURNBUCKLES

of the

Highest Quality

Bolts and Nuts

to Satisfy the Most
Exacting Requirements

Standard Screw Co.

(of Pennsylvania)

CORRY. PA.

New York Office: Woolworth Building

McCABE SLEEVES

FOR

AVIATOR CABLE

MAKE

100% JOINTS

Finished Joint



Before Twisting

Cook Sleeves For Solid Wire Have
Stood The Test For Years

BOTH SLEEVES PATENTED

FRANK B. COOK CO.

326 W. Madison St. Chicago

Twenty years of reliable manufacturing

COUNTERBALANCED

We have shipped 37940 Counterbalanced Crank Shafts up to March 10, 1917. Patent applied for

PARK DROP FORGE COMPANY, Cleveland, Ohio

The Buck Automatic Aerial Torpedo

AFTER a series of tests in Colorado, the Buck Aircraft & Munition Co., who own and control the Buck Automatic Aerial Torpedo Patents, are prepared to negotiate with Governments and other parties for production on a quantity basis.

The Buck Automatic Aerial Torpedo is an air craft equipped with a 50 H.P. Motor, and designed to carry explosives through the air to any distance up to thirty miles. A time controlled release drops the torpedo at any given distance. The entire equipment is automatic and is launched from a compressed air catapult mounted on a motor truck, the engine of which furnishes the air for the catapult.

The torpedo can be fired at any range and at any degree of the compass.

The launching of the torpedo is without shock, and consequently the most dynamically explosive materials can be carried.

The Buck Gravity Stabilizer will be used on all machines manufactured by the company.

The Buck Aircraft & Munition Co., Inc.
Ernst and Cranmer Building
Denver, Colo.

Address all Correspondence to
New York Office
Room 327, 42nd St. Building

Aeroplane Lumber Specialists

Alaska Spruce
Black Walnut
Tough White Ash

CHETHAM LUMBER CO., Inc.
20 Exchange Place New York

Telephone, Hanover 6628

Airplane manufacturers, engineers, draftsmen, etc., are requested to send us their names for our catalog mailing list.

Supplementary data sheets will be issued frequently specifying additional parts which we are prepared to furnish.

ERIE SPECIALTY COMPANY

ERIE, PA., U. S. A.

SCREW MACHINE PRODUCTS CASTINGS STAMPINGS FORGINGS

OUR SPRUCE LOGS

Are perhaps the best on the Pacific Coast.
Our facilities for supplying Aeroplane Spruce are unsurpassed.

A. C. DUTTON LUMBER CORPORATION

Mills
SOUTH BEND, WASH.
TACOMA, WASH.

General Sales Department
SPRINGFIELD, MASS.

Wharves, Warehouses and Storage Yards
POUGHKEEPSIE, N. Y.

BENOIST

Four Standard Models

Single and Twin Motored

Three to Seven Passengers

Holder of many World and American Records

Six Years Practical Experience

Land and Water Airplanes

On application by interested parties, we will submit specifications on triple and four motored machines carrying as many as twenty passengers, and guarantee performance.

Benoist Aeroplane Company
SANDUSKY, OHIO

A POPULAR PRICE AIRPLANE

SPECIFICATIONS

TWO PLACE TRACTOR BIPLANE

Span: Top 32 ft., bottom 22 ft.
Length Overall: 23 ft. 9 in.
Chord: 4 ft. 6 in. Gap: 4 ft. 6 in.
Wing Curve: N. P. L. No. 6.
Main Supporting Surface: 245 sq. ft.
Stabilizer: 18 sq. ft.
Elevators: 18 sq. ft.
Rudder: 8 sq. ft.
All auxiliary surfaces constructed of steel tubing.
Struts are 3 to 1 ratio and are hollow, linen-wrapped and varnished.
Fuselage Strut Fittings are so designed that the longitudinals are not pierced.
Entire Top of Fuselage is covered with a laminated turtle deck, linen-covered and highly varnished.
Motor is a six cylinder Radial Motor of 3½" bore and 5" stroke, turning a "Paragon" Propeller of 7 ft. 6 in. diameter, 5 ft. pitch, 1250 R.P.M.
Total Weight empty 600 lbs.
Price $3,000 f.o.b. Wheeling, W. Va.

KYLE SMITH AIRCRAFT CO.
Wheeling, W. Va.

EXCELSIOR PROPELLERS

The propeller without an equal. They are superior to any propeller produced. They are used extensively by all the leading Aviators. Large stocks and prompt shipments. NO GRADES. THE BEST AT THE SAME PRICE FOR ALL. BOOKLETS FREE.

EXCELSIOR PROPELLER COMPANY
ST. LOUIS, MO.

FOXBORO
TRADE MARK

AIR SPEED INDICATOR

Forewarns and Prevents Stalling

Accurately indicates the relative wind pressure, the force that holds the plane in the air.
Light and compact.
Send for Bulletin No. BI-110.

THE FOXBORO CO., Inc.
FOXBORO, MASS., U. S. A.
New York Chicago San Francisco

AIRPLANE CRANKSHAFTS

Guaranteed for the Most Severe Service

WYMAN-GORDON COMPANY

ESTABLISHED 1883

WORCESTER, MASS., U. S. A.

For Your Flying ← Boats Use

All the prominent builders of flying boats use this glue in combination with linen between the veneer of the diagonal planking on all their flying boats, pontoons and floats. It is not only waterproof and elastic but will waterproof and preserve the linen indefinitely. Experience has shown that when this glue is used, owing to its elasticity, the inside layer of diagonal planking will remain perfectly water tight although the outside layer may be badly broken.

L. W. Ferdinand & Co.
152 Kneeland Street
Boston, Mass., U. S. A.

WE ILLUMINATE INSTRUMENT DIALS
WITH "LUMA"—BEST LUMINESCENCE

Permanently Visible in the Dark

Specify "LUMA DIALS" to Your Instrument Maker

RADIUM DIAL COMPANY
Forbes & Meyran Aves., Pittsburgh, Pa.

A Standard Dope of Proven Quality

NAIAD AERO VARNISH

WATERPROOF—AIRTIGHT

Prevents Changing in Cloth Tension with the Atmosphere

Send 25c for sample can to:

AVIATION DEPT.
THE C. E. CONOVER CO.
101 Franklin St. **New York City**

AMERICAN PROPELLER & MFG. CO.
TRADE MARK
PARAGON
BALTIMORE MARYLAND U.S.A.

BOYCE
MOTOMETER

MOTOR HEAT INDICATOR

AN ESSENTIAL SAFETY DEVICE FOR AIRPLANES

FOREWARNS OVERHEATING

THE MOTO-METER CO., Inc.

15 Wilbur Ave.
Long Island City
New York

WILLIAMS AVIATION SCHOOL

Dual Dep Control Tractors
Tuition and Expenses Low

WILLIAMS AEROPLANE CO.
FENTON, MICH.

Aeromarine Plane & Motor Co.

Aeroplanes and Motors

New York Office: Times Building

Telephone, Bryant 6147

Wisconsin

CONSISTENT

AEROPLANE MOTORS

are correctly designed with the highest quality materials and workmanship.

Write for catalog of 6 and 12 cylinder models.

WISCONSIN MOTOR MFG. CO.

Station A. Dept. 338. Milwaukee, Wis., U. S. A.

AIRPLANE SUPPLIES

Fittings, Plans, Turnbuckles, Wheels, Tanks.

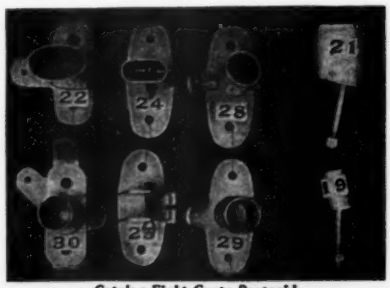

Propellers, Motors, Ribs, Struts, Steering Controls.

Catalog Eight Cents Postpaid.

CHICAGO AERONAUTICAL SUPPLY CO.

CHICAGO - - ILL.

C. A. Herrmann

DESIGN AND CONSTRUCTION

Covering All Branches of Aviation

Bath, N. Y.

DILLNER-MEYER MFG. CO., INC.

SUCCESSOR TO A. J. MEYER CO.

Airplane Turnbuckles and Fittings of Uniformity, Toughness and High Resistance to Crystalization

SCREW MACHINE PRODUCTS OF EVERY DESCRIPTION

819-821 John Street

WEST HOBOKEN, N. J.

MAXIMOTOR

IN A CLASS BY ITSELF

THE simplicity of our design, coupled with our eight years' practical experience constructing aviation motors, and the unlimited facilities at our command because of our location in Detroit—the heart of the motor industry in America—enable us to produce a motor that is right at a price that is right.

Send for Particulars

MAXIMOTOR COMPANY

1530 E. Jefferson Ave., Detroit, Mich.

FOR SALE

Three used 100 H. P. 6 Cyl.

HARRIMAN MOTORS

Harriman Motors Co.

South Glastonbury, Conn.

Classified Advertising

10 cents a word, minimum charge $2.00, payable in advance. Address replies to advertisements with box numbers, care of AVIATION AND AERONAUTICAL ENGINEERING, 120 West 32d St., New York.

AIRCRAFT ENGINEER, successful, energetic, versed in motors, and airplanes, desires executive connection in design, production, or research with reliable concern. Address, Box 65.

AERONAUTICAL DESIGNER, thoroughly familiar with construction of latest types machines, including monocoque. Can take charge of shops. Speaks French, German and English. Address, Box 26.

WANTED, an aviation expert, one capable of designing, building and testing out, also taking charge of factory. Only those whose ability and references will stand the severest probing need apply. Eagle Aerial Co., Muskegon Heights, Michigan.

Aeronautical Trade Directory

AVIATION AND AERONAUTICAL ENGINEERING will furnish information and addresses of all companies listed below. Names of Advertisers in this issue are printed in heavy face type.

ACETYLENE WELDING AND CUTTING

Davis-Bournonville Co.
Imperial Brass Mfg. Co.
Searchlight Co.

ACCESSORIES AND INSTRUMENTS

DuVivier, Earnest J.
Moto-Meter, The, Co.
O'Hara Waltham Dial Co.
Standard Aeronautical Co.

AIRPLANES

Aeromarine Sales and Engineering Corp.
American Aircraft Co. of Indiana.
Andermat Aeroplane Co.
Barnhart, G. Edward.
Bates Aeroplane Co.
Benoist Aeroplane Co.
Burgess Co., The
Carter Bros. Aeroplane Co.
C-E Aeroplane Works.
Cooper, John D., Aeroplane Co.
Chicago Aero Works.
Christofferson Aircraft Mfg. Co.
Curtiss Aeroplane and Motor Corp.
Davenport Aviation School.
Empire State Aircraft Co.
Gallaudet Aircraft Corp.
General Aeroplane Co.
Grinnel Aeroplane Co.
Heath, E. B., Aerial Vehicle Co.
Heinrich, The A. S. Corp.
Herrmann, Chas. A.
International Aircraft Co.
Janney Aircraft Co.
L. W. F. Engineering Co.
Lanzius Aircraft Co.
Lawrence-Lewis Aeroplane Co.
Miller Aeroplane Co.
New Jersey Aeroplane Co.
New York Aero Construction Co.
Pacific Aero Products Co.
Pierce, Samuel S., Aeroplane Corp.
Richardson Aeroplane Co.
Rumsey Aeroplane Co.
Smith, Kyle, Aircraft Co.
Standard Aero Corporation.
Stephens Aeroplane Co.
Sturtevant Aeroplane Co.
Thomas-Morse Aircraft Corp.
United Eastern Aeroplane Co.
Williams Aeroplane Co.
Wittemann-Lewis Aircraft Co.
Wright-Martin Aircraft Corp.

AIRPLANE ENGINES

Aeromarine Plane and Motor Co.
Ashmusen Mfg. Co.
Atwood Aeronautic Co.
Bournonville Motors Corp.
Brooke, Thomas Preston.
Christofferson Motor Corp.
Curtiss Aeroplane and Motor Corp.
Dayton Aero Motors Co.
Detroit Gas Turbine Corp.
Duesenberg, Fred S., Motor Co.
General Ordnance Co.
General Vehicle Co.
Gyro Motor Co.
Hall-Scott Motor Car Co.
Harriman Aircraft Motors Co., Inc.
Kemp Machine Works
Kluyskens, G. J.
Knox Motors Co.
Maximotor Co.
Miller, Harry A., Mfg. Co.
New Jersey Aeroplane Co.
Orio Motor Co.
Packard Motor Co.
Roberts Motor Mfg. Co.
Smith, John W.
Sterling Engine Co.
Sturtevant, B. F., Co.
Taft Pierce Mfg. Co
Thomas-Morse Aircraft Corp.
Tone Engineering Co.
Union Gas Engine Co.
Wisconsin Motor Mfg. Co.
World's Motor Co.
Wright-Martin Aircraft Corp.

AIRPLANE PARTS

Chicago Aeronautical Supply Co.

ALUMINUM

Aluminum Castings Co.
Aluminum Co. of America
American Metal Co., Ltd.
So-Luminum Mfg. & Eng. Co. (Solder)

AVIATION SCHOOLS

America Trans Oceanic Co., The
Beam School of Aviation
Christofferson Aviation School
Curtiss Training Schools
Davenport Aviation School
Denine-Deuther Aeroplane Co.
Dodge School of Aviation
Grand Rapids Aviation School
Hall Flying School
Pacific Aero Products Co.
Philadelphia School of Aviation
Staten Island School of Aviation
Stinson School of Aviation
Thomas-Morse Aircraft Corp.
Williams Aviation School
Wright-Martin Aircraft Corp.

BALL BEARINGS

Hess-Bright Mfg. Co.
New Departure Mfg. Co.
Norma Company of America.
S. K. F. Ball Bearings

BALLOONS AND DIRIGIBLES

Connecticut Aircraft Co.
Custer Specialty Co. (Statoscope)
French-American Balloon Co.
Goodyear Tire and Rubber Co.
Janney-Steinmetz and Co. (Hydrogen Cylinders)
Stevens, Leo A.
United States Rubber Co.
Waterman, Russell

BAROGRAPHS AND BAROMETERS

Green, Henry J.
Haustetter, A.
Sussfield & Lorch
Taylor Instrument Co.

BATTERIES

Electric Storage Battery Co.

BEARING METALS

American Bronze Co.
Fahrig Metal Co.
Magnolia Metal Co.

CARBURETORS

H. & N. Carburetor Co.
Master Carbureter Co.
Miller Carburetor Co.
Stromberg Motor Devices Co.
Wheeler and Schebler
Zenith Carburetor Co.

CLOCKS AND WATCHES

Ingersoll, Robt. H., and Bro.
Chelsea Clock Co.
Depollier, J., & Son
Waltham Watch Co.

CLOTHING

Abercrombie & Fitch
Cross, Mark
Lee, H. H., Mercantile Co.
Meyrowitz, E. B. (goggles)
N. Y. Sporting Goods Co.
Rogers, Peet & Co.
Sanders Co.
Spaulding, A. G., & Bros.

COMPASSES

Sperry Gyroscope Co.

DOPE AND VARNISH

Adams & Elting Co.
American Emaillite Co.
Chemical Products Co.
Conover, The C. E., Co.
DuPont Chemical Works
Flexible Compound Co.
Lucas, John, Co.
Masury, John W., & Son
National Aeroplane Co.
Pratt & Lambert
Smith, Edward, & Co.
Standard Varnish Works
Valentine & Co.

DRIFT INDICATOR

Sperry Gyroscope Co.

DYNAMOMETER

Sprague Electric Works

ENGINE PARTS

Allegheny Forging Co.
Burd High Compression Ring Co.
Doehler Die Casting Co.
Erie Specialty Co.
Fibre Finishing Co.
Gifford, Leland Co.
Gill, P. H., & Sons
Hydraulic Pressed Steel Co.
Levett, Walker M., Co.
Park Drop Forge Co.
Standard Parts Co.
Taft-Pierce Mfg. Co.
Tioga Steel & Iron Co.
Williams, J. H., & Co.
Wyman-Gordon Co.

EXHIBITION COMPANIES

The Cessna Exhibition Co.
Granburg, Gustav
Miller Aeroplane Co.
Weeks-Smalley Co.

FABRICS

Courtrai Mfg. Co.
Lamb, Finlay & Co.
Scott, Hutchison Co.

FIRE EXTINGUISHERS

Fyr-Fyter Co., The
Johns-Manville Co., H. W.
Pyrene Mfg. Co.

GLUE

Ferdinand, L. W., & Co.

GAGES

Crosby Steam Gage & Valve Co.
United States Gage Co.

HANGARS

American Bridge Co.
Anchor Corrugating Constr. Co.
Ashley Steel Bldg. Co.
Howell, Field & Goddard, Inc.
Keasby & Mattison
Milliken Bros.

LIFE PRESERVERS

Universal Safety Mattress Co.

LUMINOUS COMPOUND

Cold Light Mfg. Co.
Radium Chemical Co.
Radium Luminous Material Corp.

MAGNETOS

Bosch Magneto Co.
Berkshire Magneto Corp.
Ericsson Mfg. Co.
Remy Electric Co.
Splitdorf Electrical Co.

METALS

American Vanadium Co.
Acieral Co. of America (Aluminum Steel)
Bethlehem Steel Co.
Detroit Pressed Steel Co.
Federal Pressed Steel Co.
Garland Ventilator Co.
Gueder, Paeschke & Frey Co.

MODEL AIRPLANES

Ideal Aeroplane Supply Co.
Wading River Mfg. Co.

MOTORCYCLES

Excelsior Motor Mfg. Supply Co.
Harley-Davison Co.
Hendee Mfg. Co.
Militare Motor Vehicle Co. of America

OILS AND LUBRICANTS

Baker Castor Oil Co.
Graphite Lubricant Co.
Gulf Refining Co.
Sheppard Ideal Oil Co.
Standard Oil Co.
Texas Co.
Vacuum Oil Co.

OIL PUMPS

Wayne Oil Tank & Pump Co.

ORDNANCE

Buck Automatic Aerial Torpedo Co.
Colt Firearms Co.
Driggs-Seabury Ordnance Corp.
General Ordnance Co.
Maxim Silencer Co.
Savage Arms Co.

PHOTOGRAPHY

Brock, Arthur, Jr.
Herbert & Huesgen Co.

PONTOONS

Niagara Boat Co.
Welen Marine Equipment Co.

PROPELLERS

American Propeller & Mfg. Co.
Aviauto Mfg. Co.
Buffalo Aeroplane Corp.
C. M. O. Physical Laboratory
Excelsior Propeller Co.
Washington Aeroplane Co.

PYROMETERS

Shore Instrument & Mfg. Co.

RADIATORS

Ajax Auto & Aero Sheet Metal Co.
A-Z Co.
Bush Mfg. Co.
El Arco Radiators Co.
Livingston Radiator Co.
Rome-Turney Radiator & Mfg. Co.

SCELEROSCOPE

Shore Instrument & Mfg. Co.

SEA SLEDS

Murray & Tregurtha

SPARK PLUGS

Champion Ignition Co.
Johns-Manville Co., H. W.
Pyro Ignition Co.
Rajah Auto Supply Co.
Splitdorf Electrical Co.

SPEED INDICATORS

Foxboro Co., Inc.
Stewart Warner Speedometer Corp.

STABILIZERS

Greene Aeronautical Co.
Marlin Aerodynamic Stabilizer
Sperry Gyroscope Co.

STARTERS

Bijur Motor Lighting Co.
Christensen, The, Engineering Co.
Dayton Engineering Laboratories Co.
Motor Compressor Co.
Northeast Electric Co.
Wagner-Hoyt Electric Co.

TACHOMETERS

Queen-Gray Co.
Reliance Speedometer Co.
Stewart Warner Speedometer Corp.
Veeder Mfg. Co.

TANKS

Janney, Steinmetz & Co.

TELEPHONES

General Accoustic Co. (Aviaphone).
Streator Electric Co.
Telautograph Corp.
Western Electric Co.

TIRES AND RUBBER

Goodyear Tire & Rubber Co.
Hodgman Rubber Co.
United States Rubber Co.
Ward, J. W., Elastic Cord Co.
Whitley Exerciser Co.

TOOLS

Browne & Sharpe
Cooper, The John D., Aeroplane Co.
Hall-Scott Motor Car Co.

TRUCKS AND TRAILERS

Federal Motor Truck Co.
Four Wheel Drive Auto Co.
Nash Motors Co.
Packard Motor Car Co.
Sechler & Co., The
Service Motor Truck Co.
White Co.

TUBING

Empire Art Metal Co.
Frasse, Peter A., & Co.

TURNBUCKLES

Aero Mfg. & Accessories Co.
Ajax Iron Works
C. E. Aeroplane Works
Dillner-Meyer Mfg. Co.
Erie Specialty Co.
National Aeroplane Co.
New York & Hagerstown Metal Stamping Co.
Standard Screw Co.

WHEELS

Ackerman Wheel Co.

WIRE

American Steel and Wire Co.
Electric Cable Co.
Roebling's, John A., Sons
Simplex Wire and Cable Co.

WIRELESS

American Radio & Research Corp.
American Wireless Tel. Co.

WOODS

Alcock Co., John L.
American Wood Encysting Co.,
Chetham Lumber Co.
Delatour, J.
Dutton, A. C. Lbr. Corp.
Ludlow, Israel
Mengel, C. C., & Bros. Co.

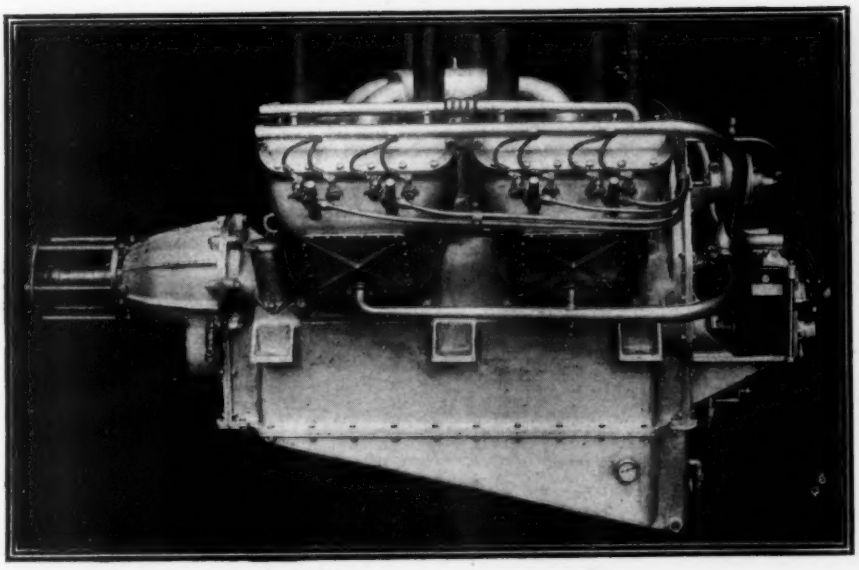

THOMAS 135 H. P. AEROMOTOR

With the increased facilities afforded by a **new concrete steel factory** and **additional manufacturing equipment,** we shall be able to meet the ever increasing demand for **Thomas Aeromotors**

Contractors to U. S. Army and Navy

THOMAS-MORSE AIRCRAFT CORPORATION

Successors to THOMAS BROS. AEROPLANE CO., Inc. THOMAS AEROMOTOR COMPANY, Inc. *Ithaca, N. Y.*

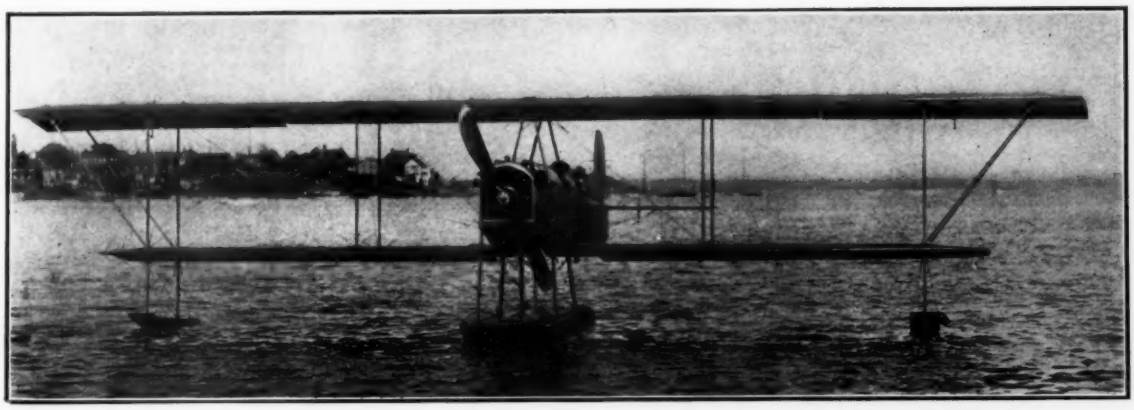

BURGESS TRAINING HYDROAIRPLANE

Among the many models of Airplanes, Seaplanes and Flying Boats produced by this company the new "U" type Hydroairplane meets a very pressing need,—an efficient, well balanced flying machine of conventional type, and low power for militia training purposes.

The Massachusetts Naval Militia has the first one now in service.

Standard Deperdussin control in duplicate: Curtiss OXX-2 motor; simple float; light, sturdy construction; large speed range (forty to sixty-eight miles per hour); are characteristics necessary to the hard service required for training purposes.

Hydroplanes and pontoons designed and manufactured for airplanes of every type including Curtiss, Sturtevant and other makers

Designers and Constructors for the U. S. Army and Navy and British Admiralty.

THE BURGESS COMPANY MARBLEHEAD, MASS.

THE WILLIAMS PRINTING COMPANY, NEW YORK

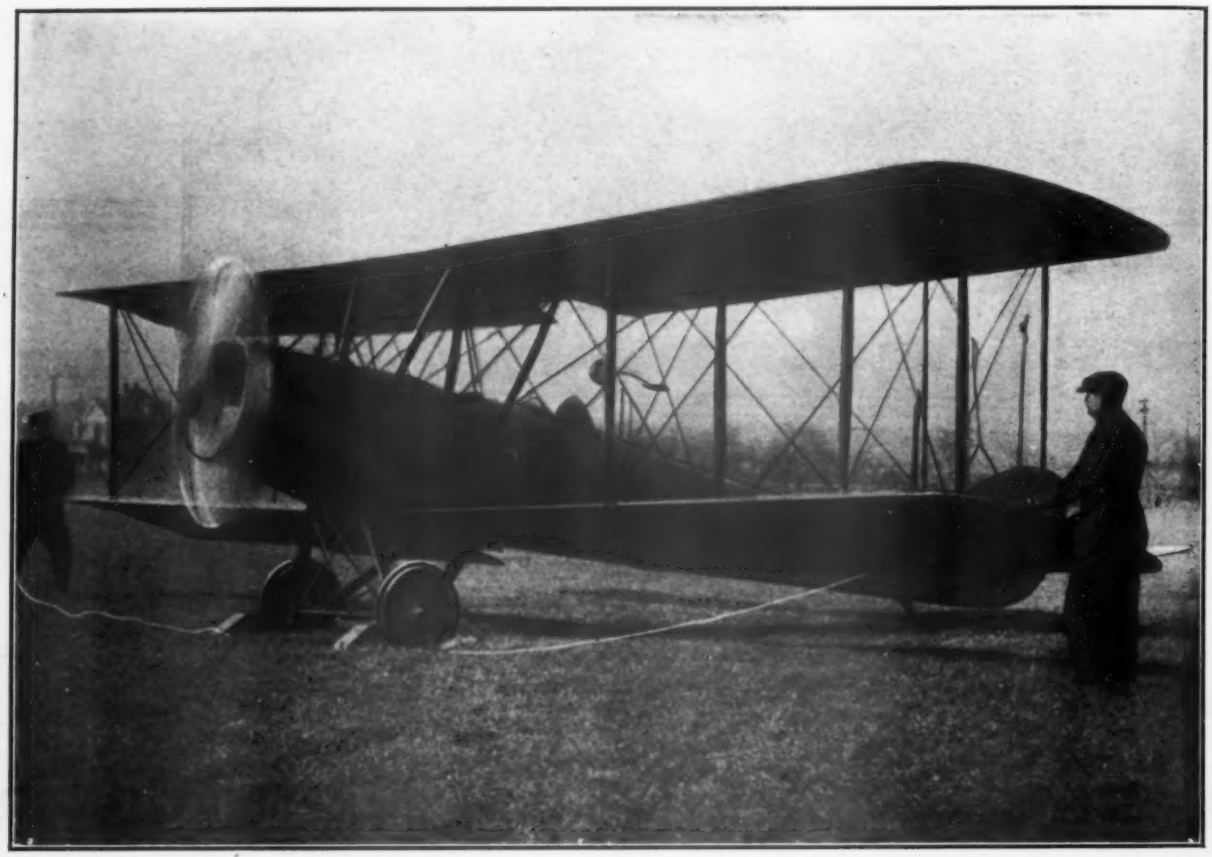

Wright–Martin
Aircraft Corporation

Owner of

The Wright Company
Glenn L. Martin Company
Simplex Automobile Company
Wright Flying Field, Inc.
General Aeronautic Company of America, Inc. (Export Company)

Manufacturer of

Modern Aeronautic Motors (Hispano-Suiza) and Aeroplanes

60 Broadway, New York